

LDALI-RM8 L-DALI 8-channel Relay Module

Installation instructions

Instructions de montage


Montageanweisung


Montagevoorschrift

Istruzioni di montaggio

Instrucciones de montaje


Monteringsanvisning

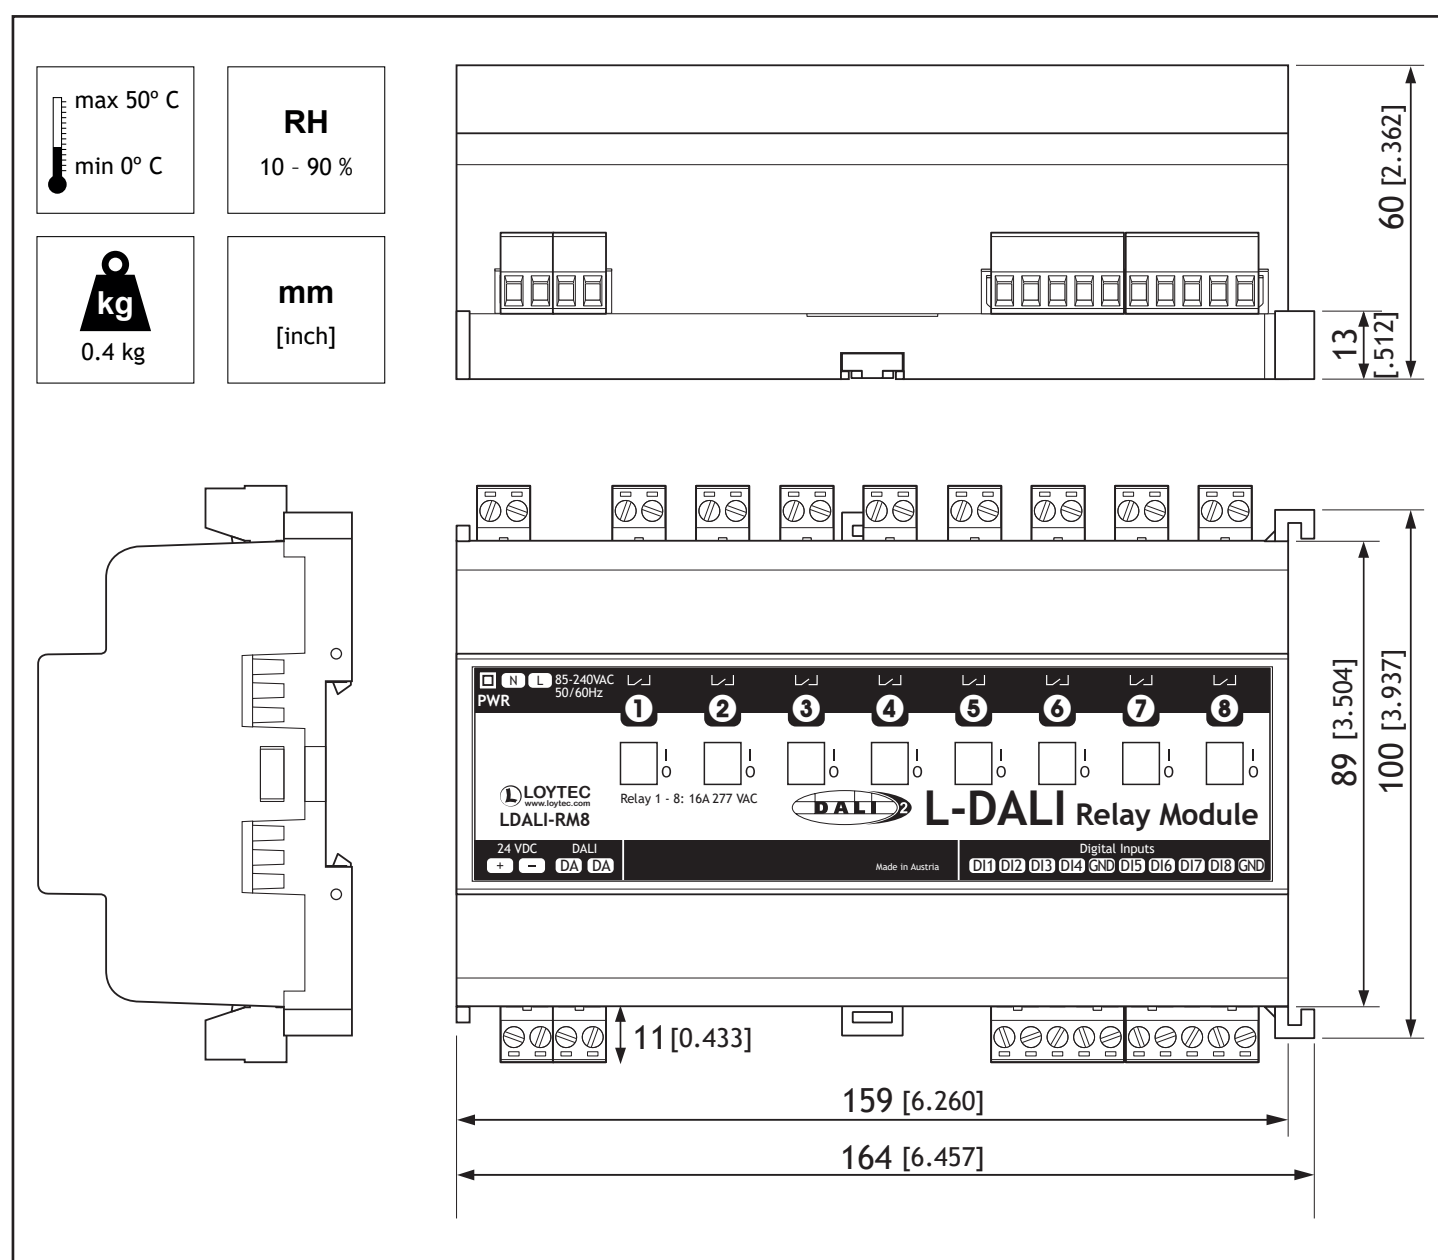

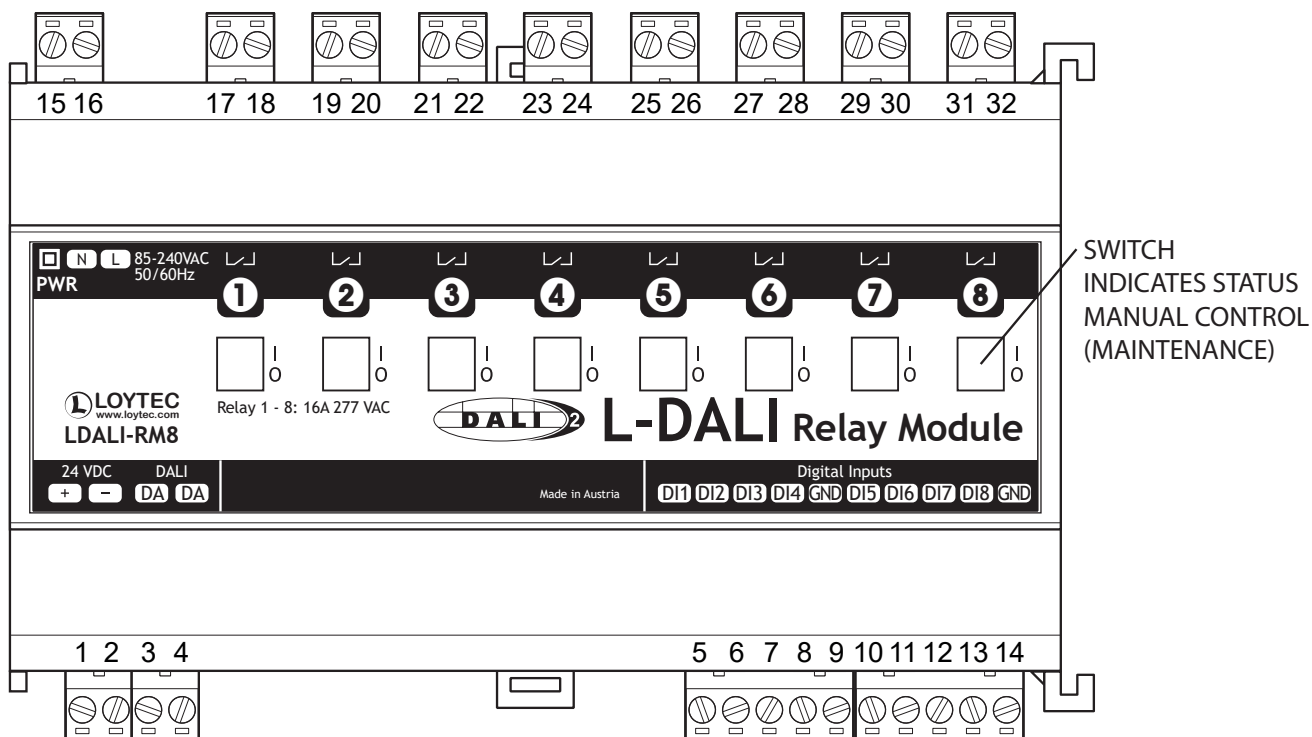

Connectors		
Optional POWER SUPPLY* 24 V DC	1	+
	2	-
DALI (2mA)	3	DA
	4	DA
Digital Inputs DI (SHORT INPUT x TO GND TURNS RELAY x ON)	5	Input DI1
	6	Input DI2
	7	Input DI3
	8	Input DI4
	9	Input GND
	10	Input DI5
	11	Input DI6
	12	Input DI7
	13	Input DI8
	14	Input GND


Connectors		
POWER SUPPLY* 85-240 V AC 50 / 60 Hz	15	Input N, neutral line
	16	Input L, phase line
DIGITAL OUTPUT RELAY 16A 277 V AC 50 / 60 Hz 16A 30 V DC	17	Relay 1
	18	Relay 1
	19	Relay 2
	20	Relay 2
	21	Relay 3
	22	Relay 3
	23	Relay 4
	24	Relay 4
	25	Relay 5
	26	Relay 5
	27	Relay 6
	28	Relay 6
	29	Relay 7
	30	Relay 7
	31	Relay 8
	32	Relay 8

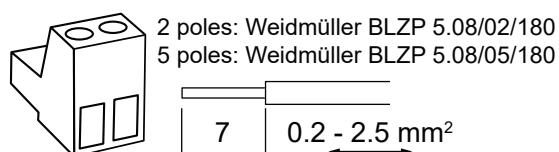


4.5 lb-in/0.5 Nm

*typ. consumption: <1 W,
max. consumption: 2 W

This control is evaluated as open type and no part of the control is evaluated as part of the ultimate enclosure. The controls are required to be installed in adequate enclosure in the end use.

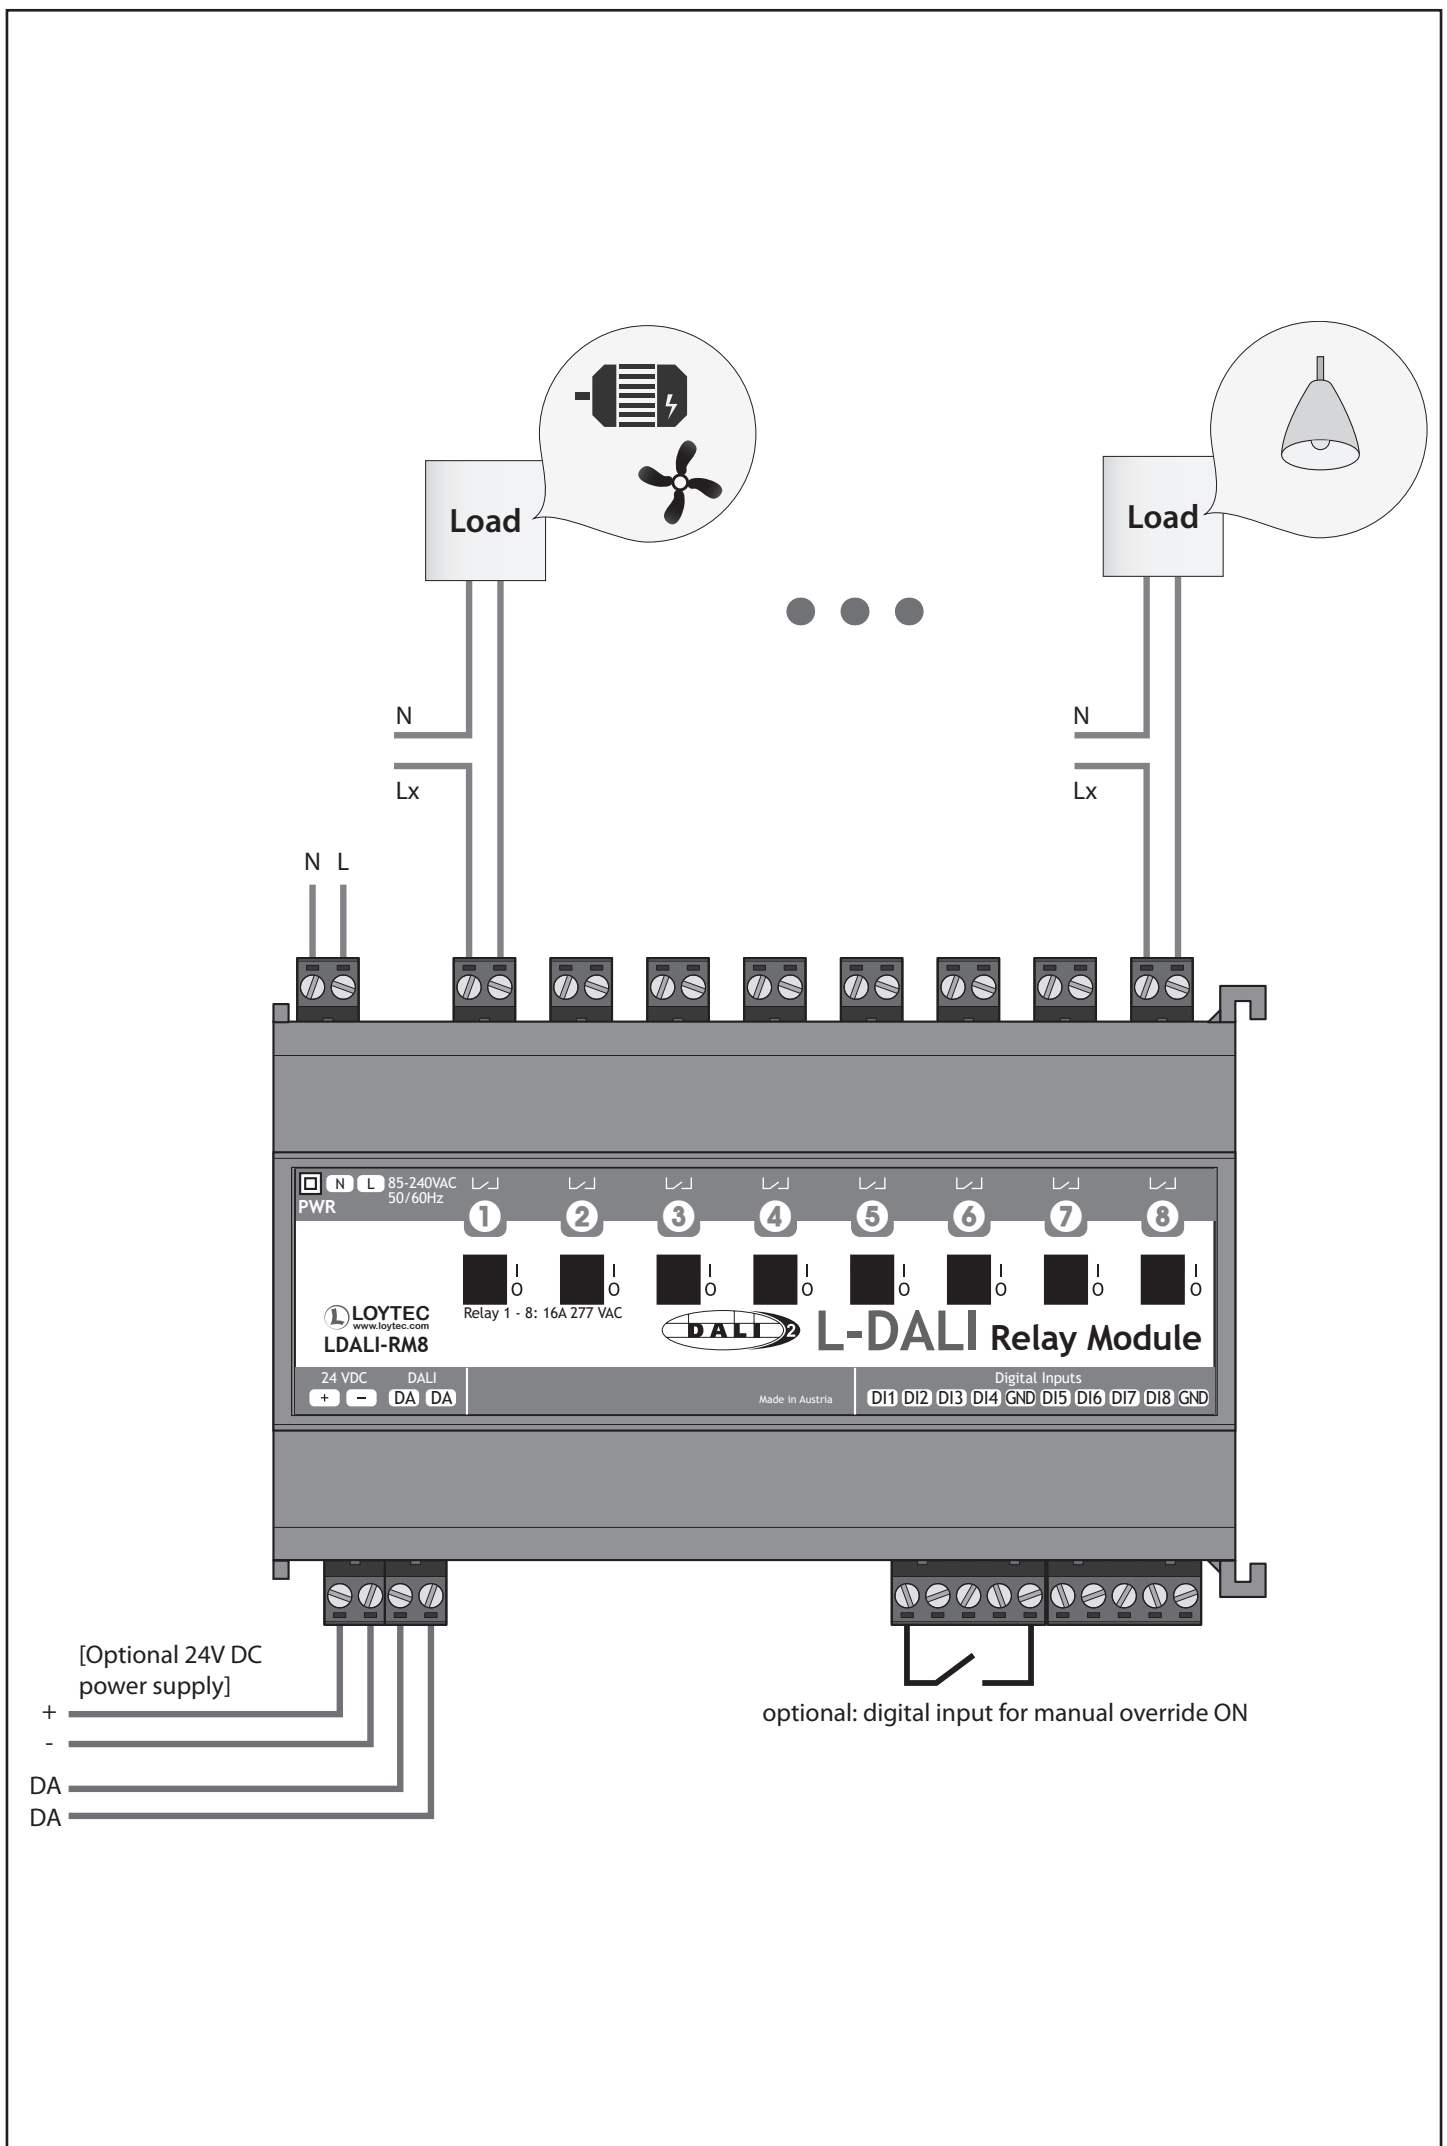

35 mm x 7.5 mm DIN rail (EN 50022, BS 5584, DIN 46277-3)

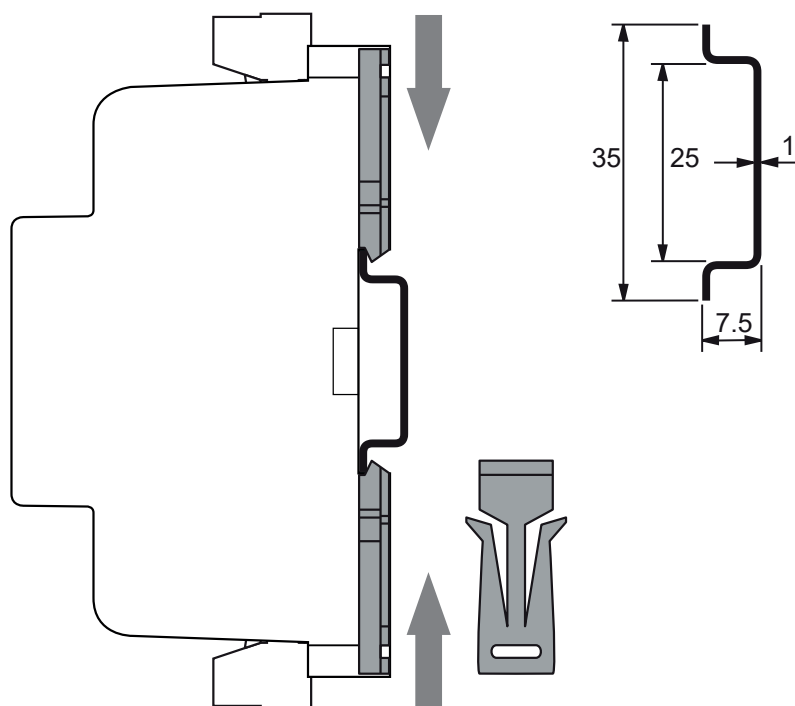


installation DIN rail 1.0

Device type

Date Code

Serial number of the device

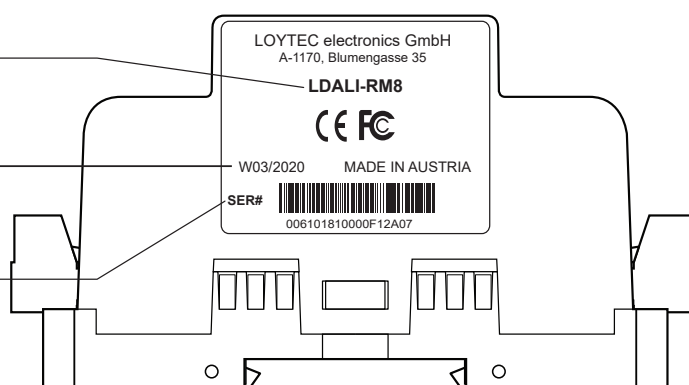

label 1.1