

LIP-1ECTC, LIP-3ECTC, LIP-13ECTC, LIP-33ECTC

CEA-709/IP Router

Installation instructions

Instructions de montage







Montageanweisung


Montagevoorschrift

Istruzioni di montaggio

Instrucciones de montaje

Monteringsanvisning

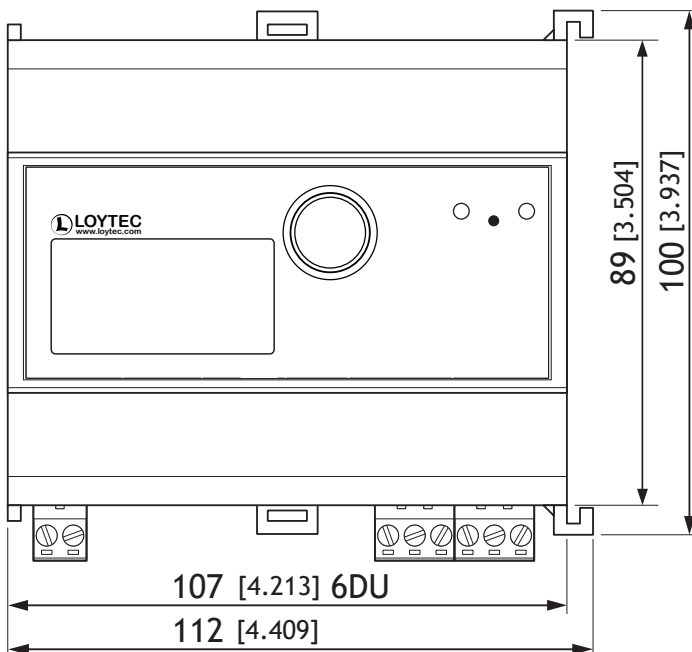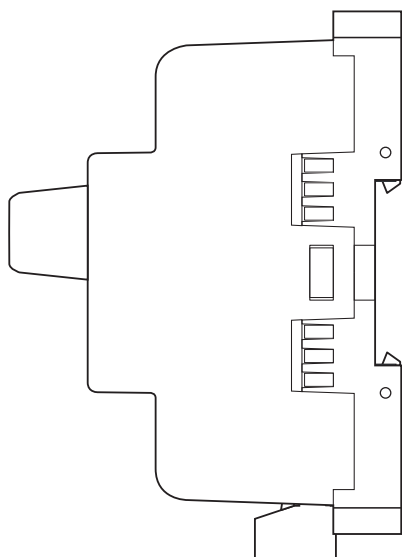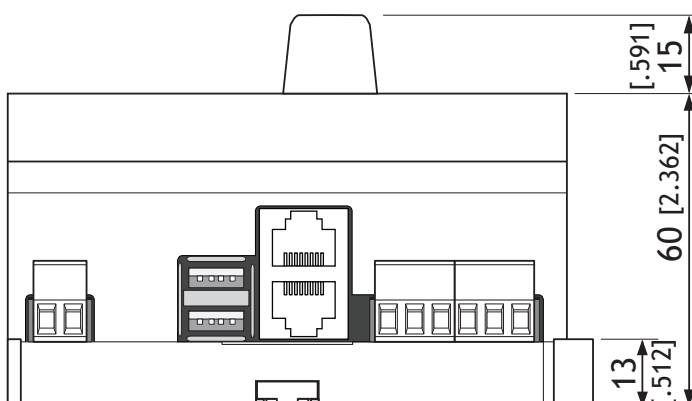


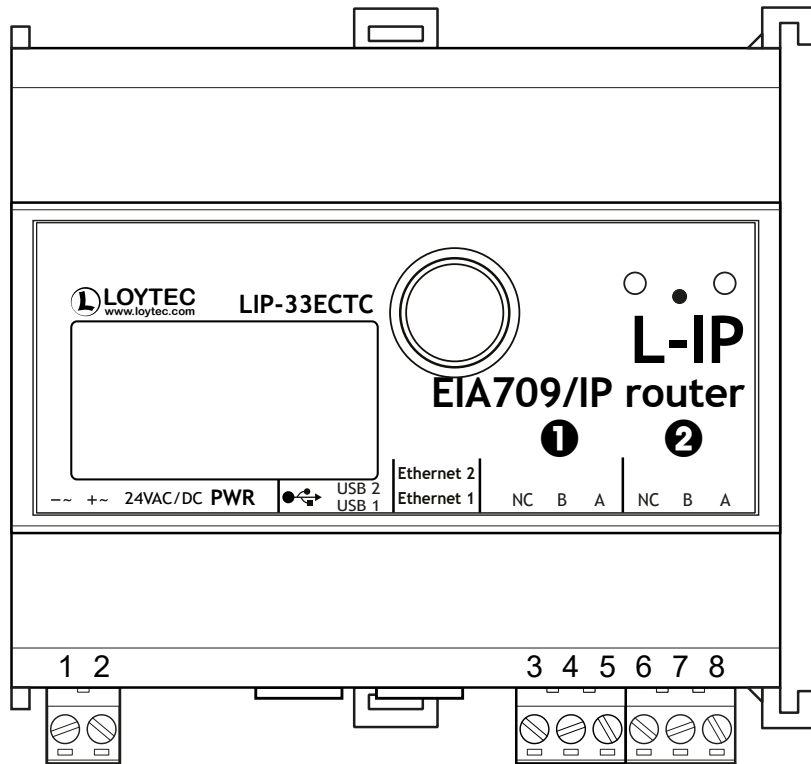


Connectors		
Input 24V Power Supply	1	24V MINUS or AC
	2	24V PLUS or AC
⚠ 24V AC/DC SELV $\pm 10\%$, use LPOW-2415B or external compatible power supply		
Connectors LIP-3ECTC		
TP/FT-10 CEA-709	3	not connected (NC)
	4	Input B
	5	Input A
Connectors LIP-1ECTC		
TP/XF- 1250 CEA-709	3	not connected (NC)
	4	Input B
	5	Input A
Connectors LIP-13ECTC		
TP/XF- 1250 CEA-709	3	not connected (NC)
	4	Input B
	5	Input A
TP/FT-10 CEA-709	6	not connected (NC)
	7	Input B
	8	Input A
Connectors LIP-33ECTC		
TP/FT-10 CEA-709	3	not connected (NC)
	4	Input B
	5	Input A
TP/FT-10 CEA-709	6	not connected (NC)
	7	Input B
	8	Input A




**Do not connect
GND to 24V MINUS**

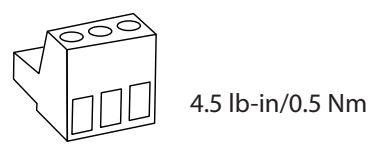

Weidmüller
 BLZP 5.08
 0.2 - 2.5 mm²



2 poles:
 Weidmüller BLZP 5.08/02/180
 3 poles:
 Weidmüller BLZP 5.08/03/180

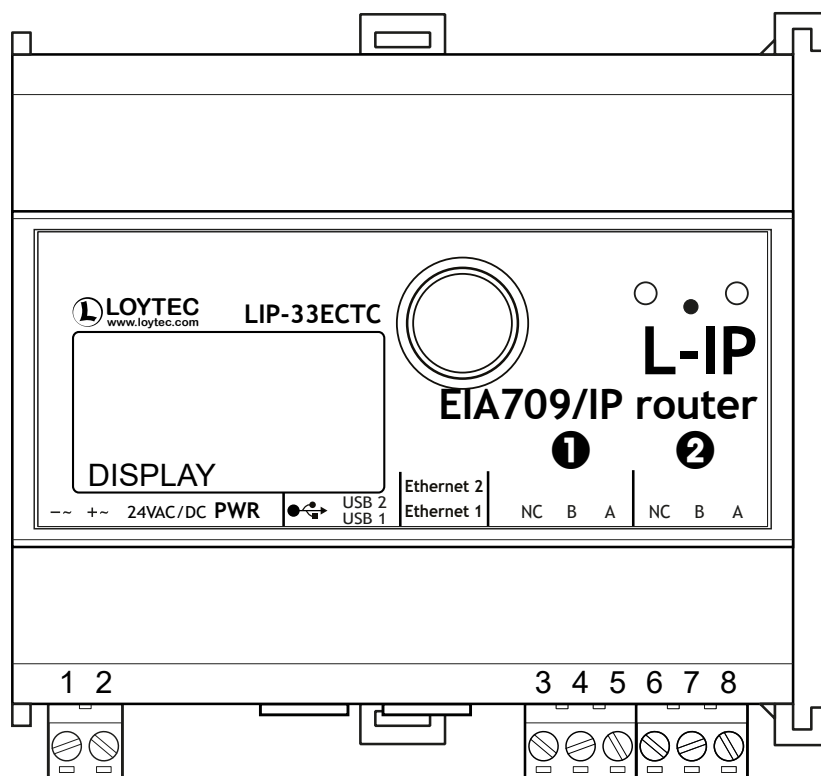

Status LEDs		
FT, TP-1250	GREEN flashing fast GREEN flashing 1 Hz RED permanent RED flashing fast	Traffic on CEA-709 port Not commissioned CEA-709 port damaged CEA-709 traffic overload

Please update the firmware of the device first,
see www.loytec.com

35 mm x 7.5 mm DIN rail (EN 50022, BS 5584, DIN 46277-3)

