

LIP-3333ECTC

CEA-709/IP router

Installation instructions

Instructions de montage


Montageanweisung


Montagevoorschrift

Istruzioni di montaggio

Instrucciones de montaje


Monteringsanvisning

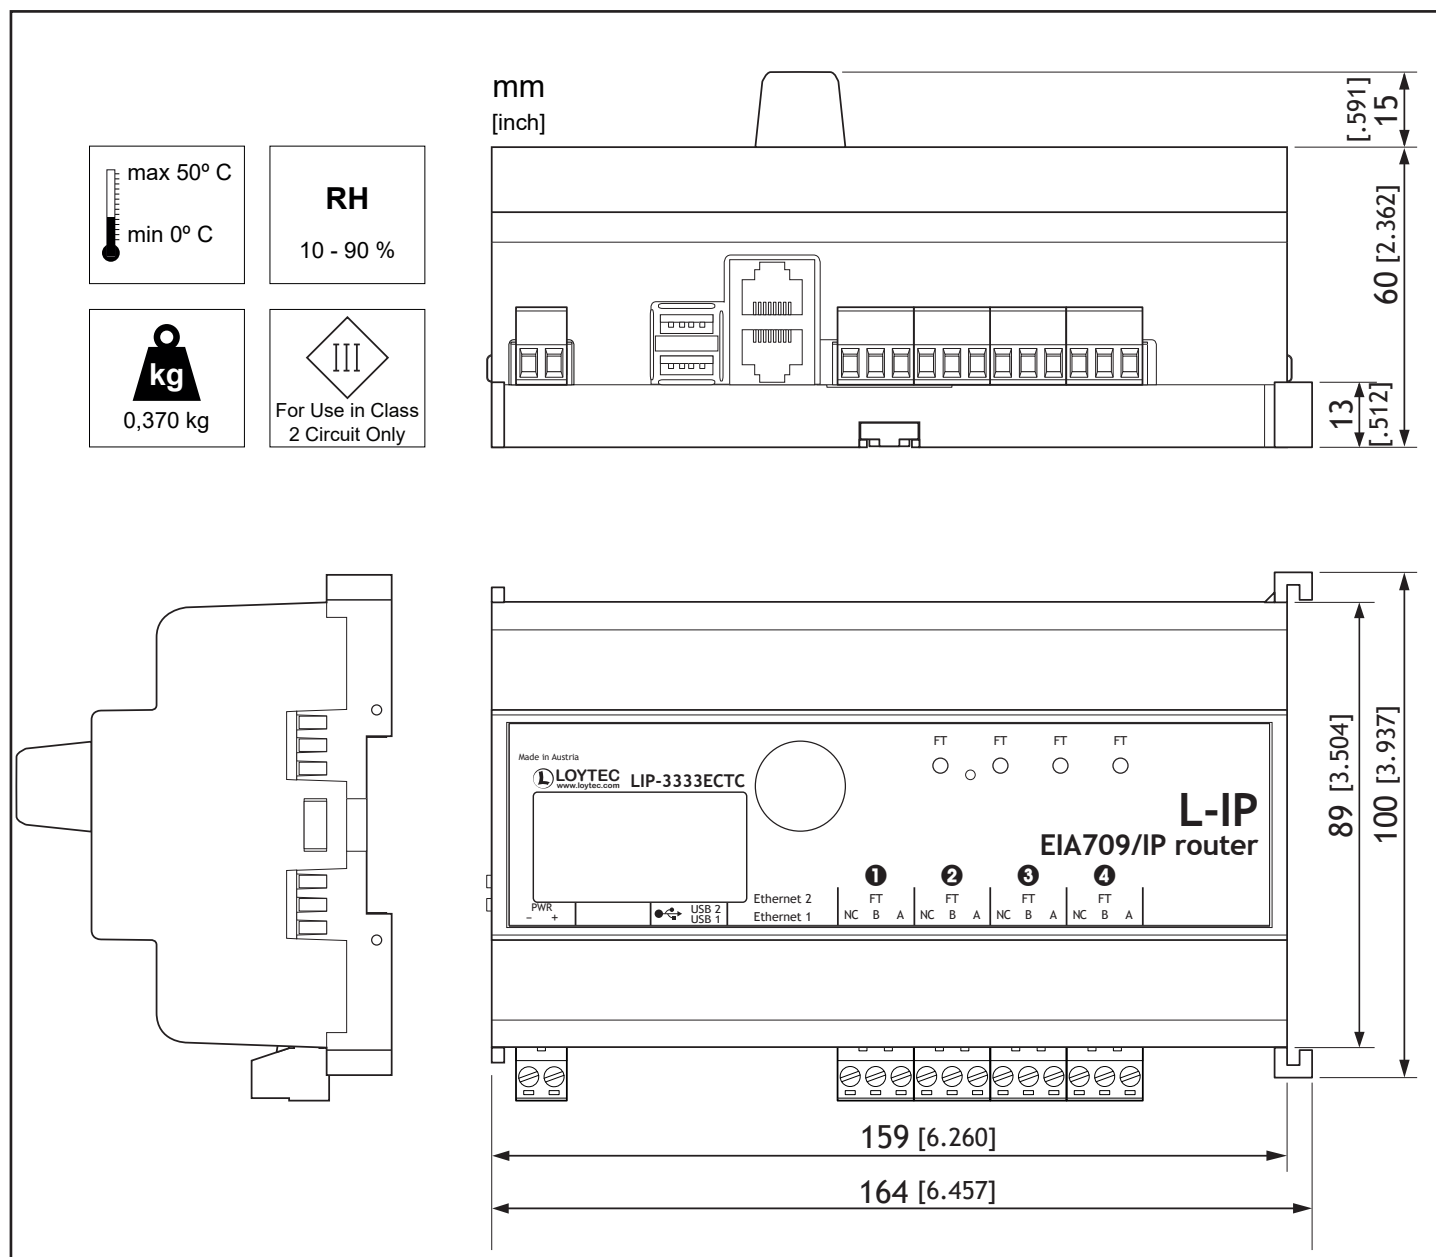

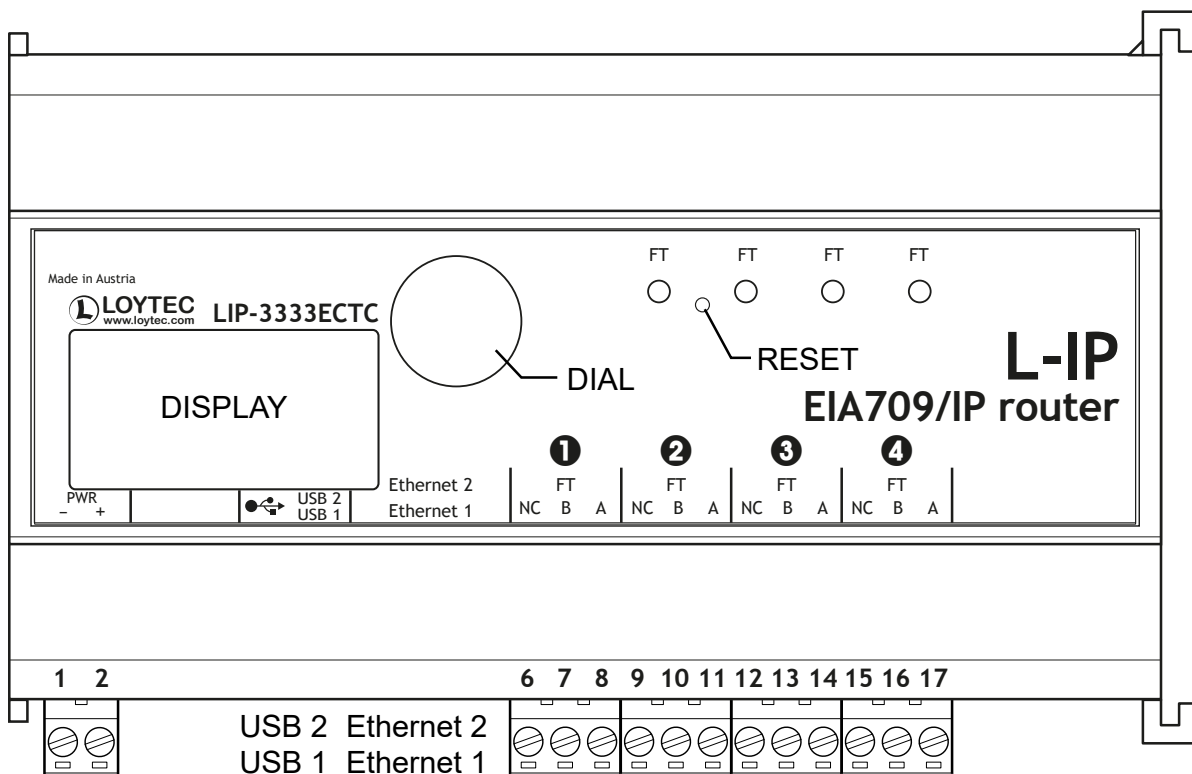


Connectors		
POWER 24 V DC/ VAC SELV	1	Power supply input GND
	2	Power supply input PLUS
CEA-709 TP/FT-10 PORT 1	6	not connected (NC)
	7	Input B
CEA-709 TP/FT-10 PORT 2	8	Input A
	9	not connected (NC)
CEA-709 TP/FT-10 PORT 3	10	Input B
	11	Input A
CEA-709 TP/FT-10 PORT 4	12	not connected (NC)
	13	Input B
	14	Input A
	15	not connected (NC)
	16	Input B
	17	Input A


Connectors		
USB1	USB-A	USB Device
USB2	USB-A	USB Device
Ethernet1	RJ45	10/100Base-T
Ethernet2	RJ45	10/100Base-T
Buttons		
RESET	Reset	
DIAL	Turn-and-Push Dial	



Weidmüller
2 poles: BLZP 5.08/02/180
3 poles: BLZP 5.08/03/180
4.5 lb-in/0.5 Nm

Weidmüller
BLZB 5.08
0.2 - 2.5 mm²



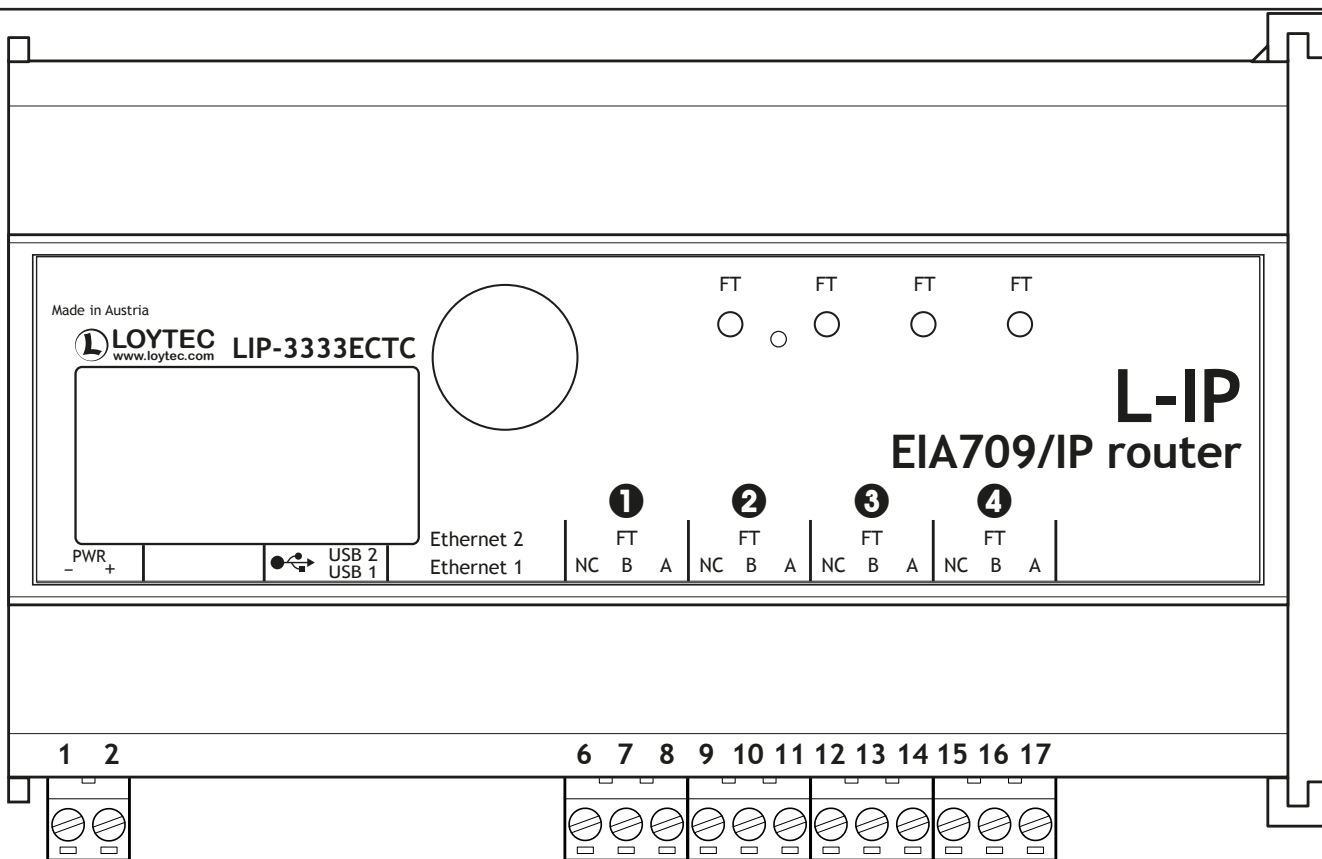

STATUS LEDs		
FT	GREEN flashing fast	Traffic on CEA-709 port
	GREEN flashing 1 Hz	Not commissioned
	RED permanent	CEA-709 port damaged
	RED flashing fast	CEA-709 traffic overload

Please update the firmware of the device first,
see www.loytec.com

35 mm x 7.5 mm DIN rail (EN 50022, BS 5584, DIN 46277-3)

