

Português



LOYTEC

Facts+.


Innovative Building Automation – Product Solutions



Member of:



Visão Geral dos produtos LOYTEC.

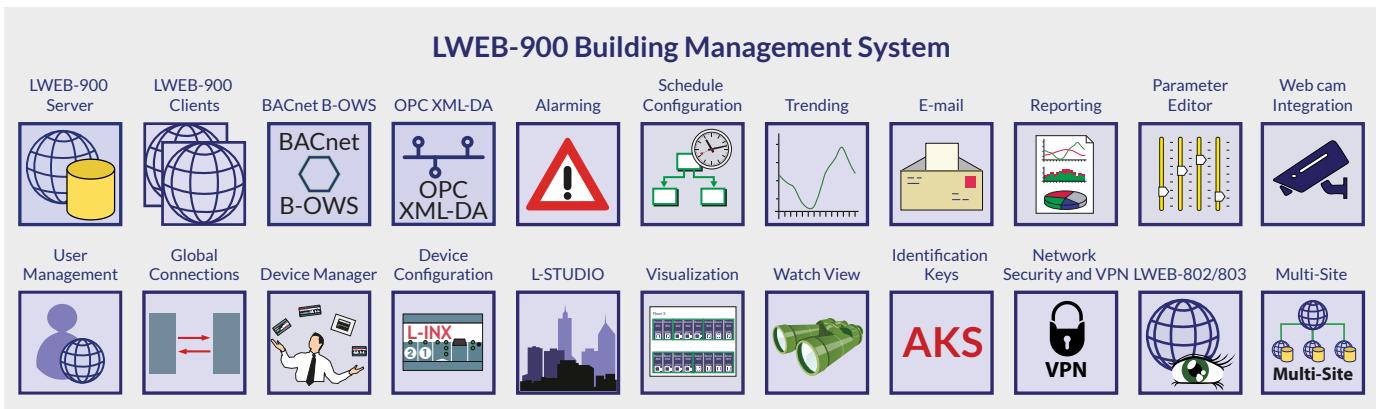


	LON	BACnet	KNX	EnOcean	Bluetooth	DALI	SMI	Modbus	M-Bus	MP-Bus	OPC	Programmable IoT
	✓	✓			✓		✓				✓	✓



User Interface

L-VIS
L-WEB
L-STAT
L-PAD

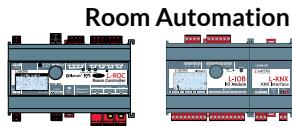

Room Automation

L-ROC
L-INX
L-IOB
L-PAD


✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
---	---	---	---	---	---	---	---	---	---	---	---	---



Lighting Control

L-DALI


✓	✓		✓	✓	✓	✓	✓		✓	✓	✓	✓
---	---	--	---	---	---	---	---	--	---	---	---	---

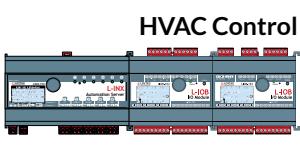

HVAC Control

L-INX
L-IOB
L-MBUS
L-MPBUS


✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
---	---	---	---	--	---	---	---	---	---	---	---	---



I/O Controller

L-IOB


✓	✓		✓		✓		✓	✓	✓	✓	✓	✓
---	---	--	---	--	---	--	---	---	---	---	---	---

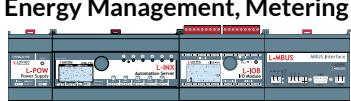

Energy Management, Metering

L-INX
L-IOB
L-MBUS

✓	✓	✓	✓				✓	✓	✓	✓	✓	✓
---	---	---	---	--	--	--	---	---	---	---	---	---

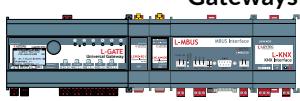

Gateways

L-GATE
L-INX
L-DALI

✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
---	---	---	---	--	---	---	---	---	---	---	---	---



Network Infrastructure

L-IP
L-Switch
NIC

✓	✓											✓
---	---	--	--	--	--	--	--	--	--	--	--	---

Sistema L-WEB.




O sistema L-WEB é uma plataforma BMS poderosa para gerir sistemas de automação em edifícios de qualquer dimensão. Consegue-se a máxima flexibilidade e escalabilidade através de uma arquitetura cliente/servidor do LWEB-900 em combinação com os controladores LOYTEC L-INX Automation Servers e L-ROC Room Controllers.

O sistema L-WEB serve para:

- Visualizar páginas gráficas personalizadas com conteúdo dinâmico em qualquer web browser,
- Análise e armazenamento de dados de longo prazo,
- Gerir horários distribuídos,
- Gerir alarmes,
- Organizar qualquer tipo de parâmetros de sistema e set points,
- Gerir dispositivos LOYTEC ainda que de forma remota,
- Criação de relatórios, nomeadamente, para consumo de energia de um edifício.
- Integração de webcams
- Funcionalidade para múltiplos locais
- VPN


Encontram-se disponíveis visualizações individuais de tarefas específicas para diferentes utilizadores via LWEB-803 dashboards, interface LWEB-802 HTML5, ou através do sistema de gestão de edifícios (BMS) LWEB-900. Múltiplos utilizadores podem usar simultaneamente as funções do sistema em diferentes PC's. O L-WEB providencia um conjunto alargado de funções para gestão de utilizadores e rastreamento de ativos. Alarmes, horários e tendências (AST™) nos dispositivos

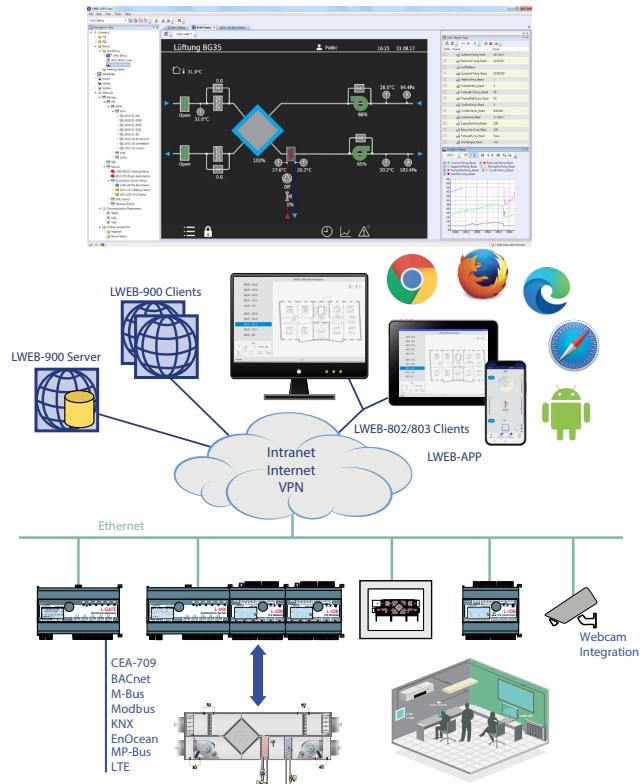

LOYTEC L-INX, L-ROC, L-VIS, L-DALI, L-IOB I/Ou, LIOB-AIR e L-GATE são automaticamente sincronizados no servidor L-WEB. As funções AST™ estão sempre disponíveis em sistema de gestão técnica de edifícios e completamente integradas no sistema L-WEB.

Produtos de conectividade.


O LGATE-902 e LGATE-952 são poderosos gateways universais que pode hospedar páginas gráficas específicas do usuário a serem usadas com LWEB 802/803. Eles podem simultaneamente integrar e mapear pontos de dados de vários protocolos abertos. Operação local e sobreposição é fornecida pelo "jog dial" incorporado e pela tela retroiluminada (128x64 pixels). Informações sobre dispositivo e ponto de dados é fornecida pela interface Web e apresentada no display via símbolos ou em formato de texto.

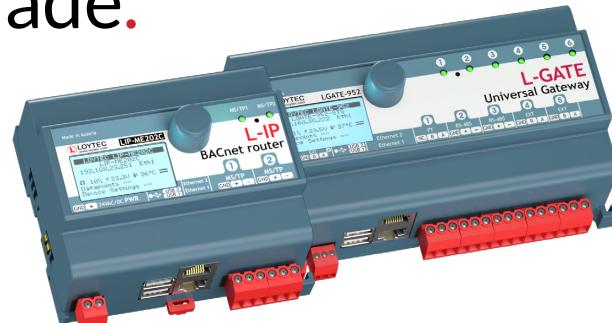

Os Routers LIP-ME201C, LIP-ME202C e LIP-ME204C BACnet/IP conectam BACnet MS/TP a uma rede BACnet/IP. Os routers BACnet são compatíveis com os Standards ASHRAE 135-2012 e ISO 16484-5:2012. Os routers podem ser configurados para atuar como um dispositivo de gerenciamento de difusão BACnet (BBMD). Os routers L-IP BACnet/IP também fornecem suporte de dispositivos externos.

Os routers L-IP LIP-1ECTC, LIP-3ECTC, LIP-13ECTC, LIP-33ECTC e o LIP-3333ECTC conecta via canais de par trançado (TP/FT10 ou TP/XF 1250) com o canal Ethernet/IP (IP 852) Sistemas LonMark. O L-IP roteia pacotes CEA 709 através rede baseadas em IP como LAN (Ethernet), Intranet ou até mesmo Internet.

L-INX Automation Servers.

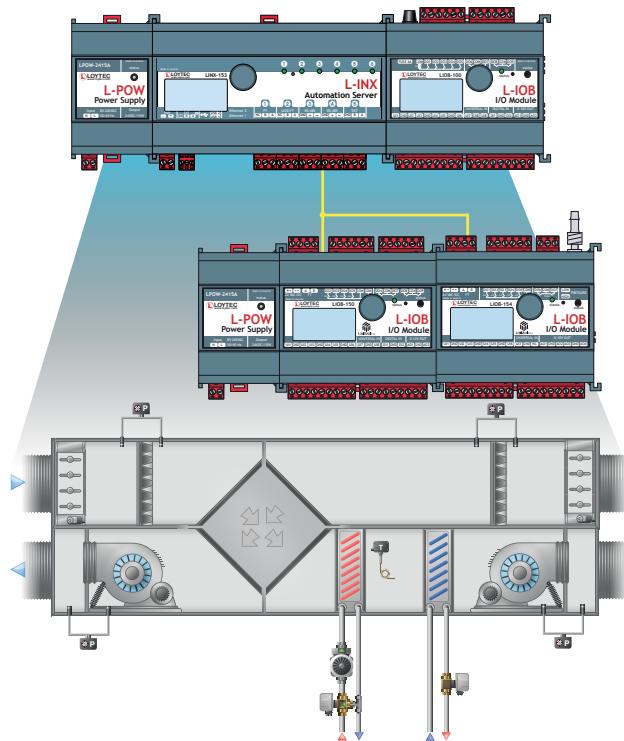

Os L-INX Automation Servers são dispositivos poderosos, livremente programáveis, multiprotocolo e que podem ser expandidos por módulos L-IOB I/O plug & play. O LINX Automation Server inclui as funções de alarmes, horários, tendências (AST™) e e-mail, para além de alojarem páginas dinâmicas que podem ser visualizadas através de qualquer web browser.

Protocolos suportados:

Protocolos de Campo	Protocolos IP
BACnet MS/TP	BACnet/IP
LONMARK TP/FT-10	LONMARK IP-852
KNX TP1	KNXnet/IP
M-Bus	OPC XML-DA, OPC UA
Modbus RTU	Modbus TCP
EnOcean	HTTPS
SMI	SMTP
MP-Bus	SNMP
	Node.js
	LTE

Os módulos L-IOB I/O podem ser ligados aos L-INX Automation Servers através de LIOB-Connect, LIOB-FT, e LIOB-IP. Os L-INX integram-se de maneira fácil no sistema LWEB via Web Services. O sistema foi concebido com características de segurança de rede, tais como, SSL, HTTPS, SSH, e o firewall, autorizando o intercâmbio de dados com os L-INX Automation Servers de forma segura, impedindo os acessos não autorizados. Os L-INX Automation Servers podem-se conectar a SMI, MP-Bus, EnOcean e WLAN através de interfaces adicionais.

Controladores e Módulos L-IOB I/O.

Os controladores L-IOB e os módulos L-IOB, livremente programáveis, têm várias configurações I/O, estão baseados em 32-bit L-CORE, assegurando recursos e funcionalidade de primeira categoria. Alguns modelos estão equipados com sensor de pressão.

Os controladores e módulos L-IOB I/O estão disponíveis com conectividade BACNet/IP ou LonMark IP-852 Ethernet, bem como LonMark TP/FT-10. Os dispositivos L-IOB I/O comunicam-se de forma independente através de variáveis de rede ou objetos BACnet nas redes correspondentes. Além disso, os módulos L-IOB estão disponíveis com interface LIOB-Connect para uma fácil e rápida ligação ao L-INX Automation Servers e, ao L-ROC Room Automation.

Todos os dispositivos L-IOB incluem um ecrã de 128 x 64 com backlight. O ecrã mostra informação do dispositivo e data points. Um seletor rotativo permite a operação local do dispositivo, possibilitando a navegação através de informação detalhada no ecrã e operação e controlo de data points.

Todos os controladores L-IOB I/O incluem funcionalidades de alarmes e horários. Os controladores L-IOB I/O baseados em IP incluem tendências e notificações via e-mail. Eles podem também alojar páginas dinâmicas acessíveis através de Web Browser. As I/Os universais estão disponíveis em LIOB-110, LIOB-112, LIOB-560, LIOB-562, LIOB-590, LIOB-592, LIOB-593, LIOB-594, LIOB-595, e LIOB-596.




L-ROC Room Automation.

O controlador L-ROC é a base para um revolucionário sistema de automação baseado em IP que permite a mudança de layout em segundos. L-ROC integra facilmente de forma nativa, no nível de controlador, sistemas BACnet/IP e LonMark.


O software L-STUDIO permite criar e ajustar aplicativos de Room Automation flexíveis incorporando o AVAC, iluminação, estores, e funcionalidades de segurança num sistema de automação integral com muito pouco esforço.

Uma parte integral da solução L-ROC é a operação sustentada em ambiente Web desde PCs ou dispositivos móveis (iOS e Android) via LWEB-803 dashboards (aplicação virtual em PC), ou páginas LWEB-802 HTML5, apresentando de forma automática projetos gráficos para operação local em Consolas Touch L-VIS.

A família de produtos L-ROC Room Controller integra os sub-sistemas DALI-2, KNX, LON, BACnet, MS/TP, Modbus, SMI, M-Bus, MP-Bus e EnOcean ao nível do controlador. Essas capacidades de integração, são a base para uma escalabilidade e flexibilidade excepcionais.

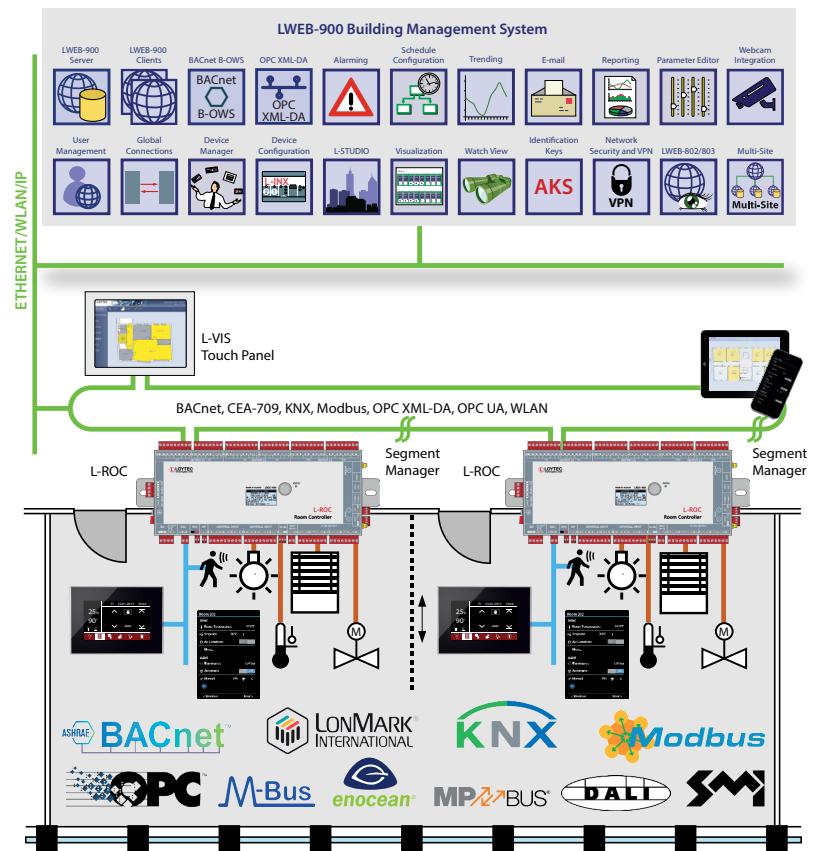

Controlador de Iluminação L-DALI.

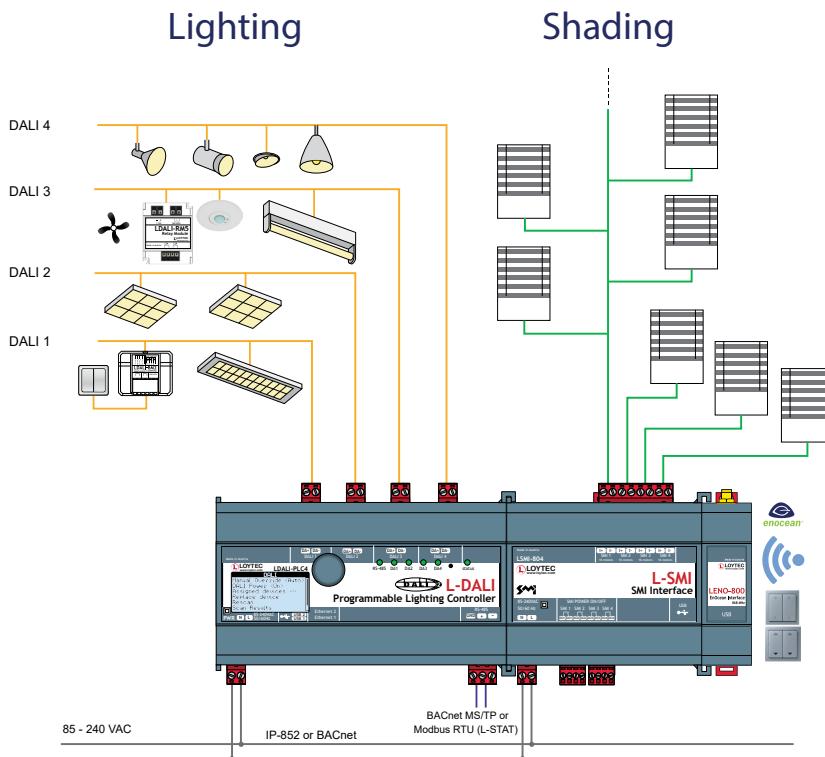

Os Controladores L-DALI são dispositivos multifuncionais certificados DALI-2 com controlo de iluminação DALI e funcionalidade de gateway entre o protocolo DALI (Digital Addressable Lighting Interface) e os Sistemas LonMark ou Redes BACnet. Além da integração de balastros DALI e dispositivos de entrada certificados DALI-2, os controladores L-DALI suportam a configuração de uma variedade de dispositivos L-DALI (módulos conversores de relé e DALI para 1-10V, dimmers de corte de fase, módulos PWM, acoplamadores de botão e multi-sensores).

O servidor web integrado permite a configuração do dispositivo, a configuração e a manutenção do sistema DALI. Os controladores L-DALI apresentam funcionalidades alarmantes, programação, tendências (AST™), funcionalidade de notificação por e-mail e, juntamente com a nova geração de multi-sensores L-DALI com bluetooth-enabled, funcionalidade de seguimento de activos e configuração de farol de sensores.

Os controladores L-DALI suportam DALI-2. Estes podem integrar dispositivos EnOcean que juntamente com a interface LSMI-804, podem criar uma inteligente e eficiente proteção do sol e anti-reflexo através do controlo ativo e ajuste de lâminas, de acordo com a posição do sol.

LPAD-7 Painéis Tácteis de Operador.



Os Painéis Tácteis de Operador LPAD-7 funcionam perfeitamente como painéis de operador de sala, termóstatos de rede ou controladores programáveis genéricos com ecrã táctil capacitivo e uma variedade de sensores integrados. O LPAD-7 adapta-se perfeitamente aos requisitos para operar em espaços comerciais ou residenciais de qualquer tipo.

O LPAD-7 oferece um design moderno e fino para montagem em parede.

O LPAD-7 é capaz de detectar temperatura, humidade, luminosidade e presença. Os Socket de montagem opcional, acrescentam uma variedade de capacidades de conectividade adicionais e um número de entradas e saídas físicas, quando necessário.

O receptor infravermelho detecta comandos a partir de um controlo remoto infravermelho. O sensor de proximidade acende a retroiluminação do visor e a distância de detecção pode ser definida (entre 20-200 cm).

A conectividade IP é via portas ethernet no dispositivo que suporta PoE, configuração de rede em ponte ou separada, para além de WLAN sem fios. O LPAD-7 pode comunicar com dispositivos de malha Bluetooth ou Bluetooth numa determinada área.

LPAD-7 implementa os protocolos abertos mais populares, tais como BACnet, Bluetooth, Modbus, OPC XML/DA, OPC UA, EnOcean, LonMark IP852 e FT.



L-STAT Room Operator Panels.



O L-STAT é um dispositivo de controlo com design moderno e minimalista que satisfaz em qualquer tipo de decoração de interiores, é ligado diretamente a controladores LOYTEC com interface Modbus.

Podem ser ligados até 16 dispositivos L-STAT a um controlador. O L-STAT está equipado com um ecrã de LCD com RGB backlight com cor ajustável, oferecendo uma configuração para conseguir que o L-STAT harmonize com o conceito de cor interior de qualquer edifício. Oito botões capacitivos são utilizados para ajustar os valores de set points. Ainda podem-se ligar quatro botões externos. Dependendo da versão, os sensores internos do L-STAT medem temperatura, humidade, ponto de orvalho, iluminação de ambiente, ocupação e o nível de CO₂ do ar. Também, são mostrados no ecrã LCD a data e o tempo, bem como o nível atual de otimização de energia.

Dispõe de um besouro com retroalimentação acústica dos botões touch e pode ser também usado para indicar alarmes e estados de falhas. Para prevenir alterações não autorizadas, dispõe de dois níveis de acesso (utilizador e integrador de sistemas). Além disso o L-STAT inclui um recetor de infravermelhos (NFC) para um controlo remoto confortável.

Adicionalmente, eles podem ser equipados com uma interface EnOcean. Nesse caso, o L-STAT atua como um transceptor EnOcean remoto para todos os controladores que suportam uma interface L-STAT.

Consolas Touch L-VIS.

As consolas touch L-VIS são idealmente adequadas para a visualização e operação de vários aplicativos em automação de edifícios. Nas consolas touch L-VIS visualizam-se sistemas de automação de edifícios, podem ser utilizados como unidades de controlo em quadros elétricos ou para salas de conferências e áreas de receção.

L-VIS tem um impressionante desenho contemporâneo, integra-se de forma harmônica em arquitetura moderna e histórica, além de ser extremamente amigável com o utilizador. A sua pouca profundidade de montagem e baixa perda de calor permite a sua montagem em quase qualquer lugar.

Para a operação e monitorização de informação em sistemas LonMark, redes BACnet ou Modbus, estão disponíveis os seguintes tipos de consolas touch:

- 7" L-VIS Consola touch, (LVIS7-32Gx), 1024 x 600, 16.7 milhões de cores, marco frontal de vidro e toque capacitivo
- 12.1" L-VIS Consola Touch, (LVIS12-32Gx), 1024 x 768, 16.7 milhões de cores, marco frontal de vidro e toque capacitivo
- 15" L-VIS Consola Touch, (LVIS15-32Gx), 1024 x 768, 16.7 milhões de cores, marco frontal de vidro e toque capacitivo



Integração IoT.



A Internet das Coisas permitiu o nascimento de dispositivos com interfaces baseadas na Web, como projetores multimédia, sistemas A/V, TVs inteligentes ou lâmpadas inteligentes. A inovadora integração de IoT baseada em JavaScript da LOYTEC permite integrar todos eles com os nossos produtos.

Aplicações típicas são salas de reuniões ou auditórios com controlo de cena de iluminação e estores, integração de dispositivos de terceiros e operação de equipamentos multimédia com apenas o toque de um único botão. Produtos similares do setor de consumo, como um sistema de áudio Sonos®, luzes Philips Hue ou Alexa e restantes, podem ser conectados ao Sistema de Controle de edifícios LOYTEC.

A função IoT (Node.js) permite conectar o sistema a praticamente qualquer serviço Cloud, tanto para fazer upload de dados históricos para serviços de análise como para enviar mensagens de alarme para serviços de processamento de alarmes ou partes operacionais do sistema de controle em um serviço Cloud (por exemplo, programação baseada em calendários Web ou sistemas de reservas).


É possível processar informações da Internet como dados meteorológicos baseado no controlo de previsão. Finalmente, o kernel do JavaScript também permite implementar protocolos em série para equipamentos não-padrão no controle primário da planta.

Resumindo: tudo o que é possível controlar com uma aplicação, é também possível integrar em Sistemas de Edifícios ou numa interface de um painel táctil.



Multimedia Integration

- Scene control
- Integrated room functions
- Control projectors
- Control sound systems
- Smart screens control

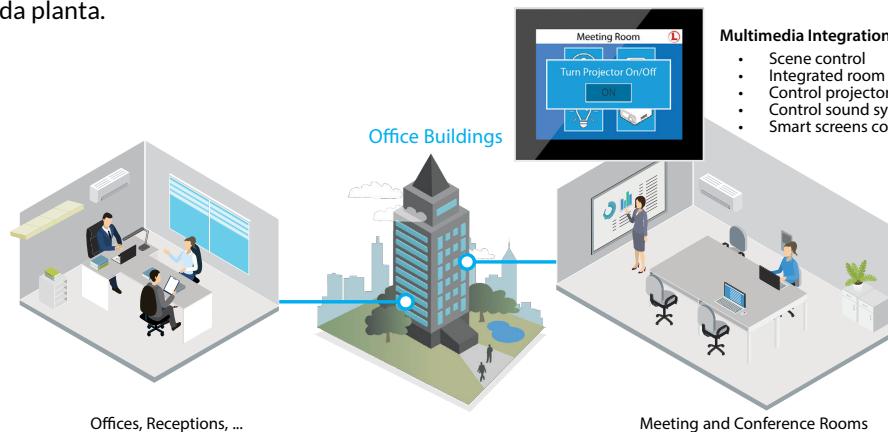

Product name	L-WEB Building Management Software			
Model	LWEB-900	LWEB-900-MAX	LWEB-803	LWEB-802
Product description				
Hardware requirements	LWEB-900 server: PC with at least 2 GHz, 32- or 64-bit processor, 4 GB RAM, 50 GB free hard disk space, Ethernet connection LWEB-900 client: PC with at least 2 GHz, 32- or 64-bit processor, 2 GB RAM, 1 GB free hard disk space, Ethernet connection, screen resolution 1280x720			
Operating system	Windows 10, Windows 11, Windows Server 2012, Windows Server 2016, Windows Server 2019			
Visualization and operation	■	■	■	■
Graphical view	■	■	■	■
Alarming	■	■	■	■
Scheduling	■	■	■	■
Trending	■	■	■	■
Event log	■	■	-	-
Parameter view	■	■	-	-
Global connections	■	■	-	-
Device manager	■	■	-	-
Device configuration	■	■	-	-
Multiuser system	■	■	■	■
Reporting	■	■	-	-
Watch view	■	■	-	-
AKS-Identification keys	■	■	-	-
Webcam integration	■	■	-	-
Scripting	■	■	-	-
Recommended limit for SQLite	10 GBytes, 1 record =100 bytes -> 100.000.000 records		-	-
Max. number of devices	1000		-	-
Max. number of multi-sites	50		-	-

Product name	L-WEB Building Management Add-on licenses
Add-on licenses	Description
LWEB-900-ADD-10	Add-on license for 10 additional devices
LWEB-900-ADD-MAX	Add-on license for max. 1000 devices
LWEB-900-CL-5	Add-on license for additional 5 LWEB-900 clients
LWEB-900-80x-50	Add-on license for additional 50 LWEB-80x clients
LWEB-900-80x-100	Add-on license for additional 100 LWEB-80x clients
LWEB-900-80x-MAX	Add-on license for an unlimited number of LWEB-80x clients
LWEB-900-MS	Add-on license to enable multi-site support
LWEB-900-VPN-BASE	Add-on license to enable VPN support in LWEB-900 for one project, includes LWEB-900-VPN-MNT for 1 year
LWEB-900-VPN-MNT	Add-on license to add/remove VPN clients in LWEB-900 for all projects. Valid for 1 year.

Product name	L-INX Automation Servers		
Model	LINX-153	LINX-154	LINX-215
			
BACnet device profile		B-BC	
Power supply		24 VDC / 24 VAC ± 10%, typ. 2.5 W	
CPU		Quad-core ARM Cortex-A53 @ 1.1GHz	
RAM	1 GByte	1 GByte	1 GByte
FLASH	8 GByte	8 GByte	8 GByte
TP / FT-10 ports	1	-	1
LIOB-FT ports	1	-	1
RS-485 ports	2	4	1
Extension port (KNX)			
Extension / Serial port (M-Bus)	1	1	1
Total number of data points		30000	10000
OPC data points		10000	5000
BACnet objects		2000	1000
BACnet calendar		25	25
BACnet scheduler		100	100
BACnet notification classes		32	32
Trend logs	512 (13 000 000 entries, ≈ 200 MB)		512 (13 000 000 entries, ≈ 200 MB)
LonMark calendar	1 (25 calendar patterns)		1 (25 calendar patterns)
LonMark scheduler	100		100
LonMark alarm servers	1		1
Modbus data points	2000	5000	2000
L-WEB clients	32		32
L-IoB I/O modules	Up to 24 L-IoB I/O Modules in any combination of type LIOB-Connect, LIOB-FT, LIOB-IP852/BIP		Up to 8 L-IoB I/O Modules in any combination of type LIOB-Connect, LIOB-FT, LIOB-IP852
IEC-61131-3	■	■	■
IEC-61499	■	■	■
CEA-709 Router	■	-	■
CEA-709 RNI	■	-	■
CEA-709 (FT)	■	■	■
CEA-852 (IP)	■	■	■
BACnet Router	■	■	■
BACnet MS / TP	■	■	■
BACnet TCP / IP	■	■	■
BBMD	■	■	■
Modbus RTU/ASCII	■ 1	■ 1	■ 1
Modbus TCP / IP	■	■	■
M-Bus	■ 2	-	■ 2
MP-Bus	■ 3	-	■ 3
SMI	■ 3	-	■ 3
KNX TP1	■ 2	-	■ 2
KNX IP	■	-	■
EnOcean	■ 3	-	■ 3
OPC XML-DA	■	■	■
OPC UA	■	■	■
SNMP	■	■	■
LIOB-Connect	■	■	■
LIOB FT + IP	■	■	■
128 x 64 graphic display with backlight	■	■	■
USB	■	■	■
Ethernet switch	■	■	■
WLAN	■ 3	■ 3	■ 3
LTE	■ 3	■ 3	■ 3
IoT	■	■	■
L-STUDIO	■	■	■
SSH, HTTPS, Firewall	■	■	■
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)		
Dimensions (L x W x H, mm)	159 x 100 x 75		107 x 100 x 75
Certificates	CE, FCC, BTL, UL		CE, FCC, BTL, UL

1. Modbus RTU/ASCII can only be used if BACnet MS / TP is not active on the same port.

2. M-Bus and KNX TP1 can be used alternatively only on this model. An expansion module is needed and must be ordered separately.

3. To operate these protocols, an expansion module is needed and must be ordered separately.

Product name	L-ROC Room Controller			
Model	LROC-102	LROC-400	LROC-401	LROC-402
				
Power supply	24 VDC / 24 VAC ±10%, typ. 2.5 W	24 VDC or 85 – 240 VAC, 50 – 60 Hz (both supplies can be redundantly fed, do not connect 24VDC if SMI or DALI are used)		
CPU		Quad-core ARM Cortex-A53 @ 1.1GHz		
RAM	1 GByte	1 GByte	1 GByte	1 GByte
FLASH	8 GByte	8 GByte	8 GByte	8 GByte
TP / FT-10 ports	1	-	-	-
LIOB-FT ports	1			
RS-485 ports ³	1	1	1	-
Extension port (KNX)	1	1	1	1
Extension/Serial port (M-Bus)	1	1	1	-
Total number of data points	30000	30000	30000	30000
OPC data points	10000	10000	10000	10000
BACnet objects	4000	4000	4000	4000
BACnet calendar	25	25	25	25
BACnet scheduler	100	100	100	100
BACnet notification classes	32	32	32	32
Trend logs	512 (13 000 000 entries, ≈ 200 MB)			
LonMark calendar	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)
LonMark scheduler	100	100	100	100
LonMark alarm servers	1	1	1	1
Modbus data points	4000	2000	2000	2000
L-WEB clients	32	32	32	32
L-IoB I/O modules	Up to 24 (L-IoB I/O Modules in any combination of type LIOB-Connect, LIOB-FT, and LIOB-IP852 / LIOB-BIP)			
IEC-61131-3	-	-	-	-
IEC-61499	■	■	■	■
CEA-709 Router	■	■	■	-
CEA-709 RNI	-	-	-	-
CEA-709 (FT)	■	-	-	-
CEA-852 (IP)	■	■	■	■
BACnet Router	■	■	■	■
BACnet MS / TP	■	■	■	-
BACnet TCP / IP / SC	■	■	■	■
BBMD	■	■	■	■
Modbus RTU/ASCII	■ ³	■ ³	■ ³	-
Modbus TCP / IP	■	■	■	■
M-Bus	■ ⁴	■ ⁵	■ ⁵	-
KNX TP1	■ ⁴	■	■	■
KNX IP	■	■	■	■
SMI	■ ⁵	■	■	■ ⁵
EnOcean	■ ⁵	■	■	■ ⁵
OPC XML-DA	■	■	■	■
OPC UA	■	■	■	■
SNMP	■	■	■	■
LIOB Connect	■	-	-	-
LIOB FT + IP	■	■ (IP only)	■ (IP only)	■ (IP only)
128 x 64 graphic display with backlight	■	■	■	■
microSD Card	-	-	-	-
USB	■	■	■	■
Ethernet switch	■	■	■	■
WLAN	■ ⁵	■ ⁵	■ ⁵	■ ⁵
LTE	■ ⁵	■ ⁵	■ ⁵	■ ⁵
IoT	■	■	■	■
L-STUDIO	■ (IEC 61499 only)	■ (IEC 61499 only)	■ (IEC 61499 only)	■ (IEC 61499 only)
SSH, HTTPS, Firewall	■	■	■	■
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)			
Dimensions (L x W x H, mm)	159 x 100 x 75	290 x 144 x 54	290 x 144 x 54	290 x 144 x 54
Certificates	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL

1. This model can be configured to have either FT or IP active for CEA-709.

2. This model can be configured to have either MS / TP or IP active for BACnet.

3. Modbus RTU/ASCII can only be used if BACnet MS / TP is not active on this model.

4. M-Bus and KNX TP1 can be used alternatively only on this model. An expansion module is needed and must be ordered separately.

5. To operate these protocols, an expansion module is needed and must be ordered separately.

Product name	L-ROC Room Controller		
	LROC-400	LROC-401	LROC-402
			
MP-Bus (actuator)	■	■	■
Universal Input (UI)	10	-	10
Digital Input (DI)	2	-	2
Analog Output (AO)	8	-	8
Digital Output (DO)	32 (24 x Relay, 8 x TRIAC) Relay : 10 A TRIAC : 0.5 A @ 24-240 VAC	-	32 (24 x Relay, 8 x TRIAC) Relay : 10 A TRIAC : 0.5 A @ 24-240 VAC
Max. number of Rooms /Segments	8	16	8
SMI devices (via built-in interface)	1 x 16	1 x 16	-
SMI devices via LSMI-800	1 x 16	1 x 16	1 x 16
SMI devices via LSMI-804	4 x 16	4 x 16	4 x 16
SMI devices maximum	96	96	64
EnOcean devices (via built-in interface)	32	64	-
EnOcean devices via LENO-80x	-	-	32
EnOcean devices (maximum)	64	64	64
EnOcean devices commissioning limit	32	64	32
L-STAT Room operator panels	8	16	8
DALI power supply	1 (16 VDC,160 mA guaranteed supply current, 250 mA max. supply current)	1 (16 VDC,160 mA guaranteed supply current, 250 mA max. supply current)	-
DALI devices	64	64	-
DALI groups	16	16	-
DALI sensors	16	16	-
DALI pushbuttons (LDALI-BM2)	64 pushbutton coupler	64 pushbutton coupler	-
MP-Bus devices (via built-in interface)	1 x 8 (16 MPL)	1 x 8 (16 MPL)	1 x 8 (16 MPL)
MP-Bus devices via LMPBUS-804	4 x 8 (16 MPL)	4 x 8 (16 MPL)	4 x 8 (16 MPL)
MP-Bus devices (maximum)	80	80	80

Product name	L-IOB I/O Modules (LIOB-Connect)					
Model	LIOB-100	LIOB-101	LIOB-102	LIOB-103	LIOB-110	LIOB-112
						
Power supply	24 V DC / 24 V AC ±10 % via L-INX, L-ROC, LIOB-586/587/588/589, L-POW or LIOB-A2/A4 via LIOB-Connect					
Universal Input (UI)	8	8	6	6	-	-
Digital Input (DI)	2	16	-	-	-	-
Analog Output (AO)	2	-	6	6	-	-
Digital Output (DO)	9 (5 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC)	-	8 (Relay 6A @ 250 VAC)	5 (Relay 16A @ 250 VAC)	-	-
Universal I/O (IO)	-	-	-	-	20	40 ¹
Connection	LIOB-Connect	LIOB-Connect	LIOB-Connect	LIOB-Connect	LIOB-Connect	LIOB-Connect
128x64 graphic display with backlight	■	■	■	■	■	■
Ethernet switch	-	-	-	-	-	-
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)					
Dimensions (L x W x H, mm)	107 x 100 x 75					
Certificates	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL	CE, FCC	CE, FCC

Product name	I/O Modules (LIOB LonMark TP / FT-10)					I/O Modules (LIOB LonMark IP-852)				
Model	LIOB-150	LIOB-151	LIOB-152	LIOB-153	LIOB-154	LIOB-450	LIOB-451	LIOB-452	LIOB-453	LIOB-454
										
Power supply	24 VDC / VAC ±10 % via L-POW, or with an external power supply									
Universal Input (UI)	8	8	6	6	7	8	8	6	6	7
Digital Input (DI)	2	12	-	-	-	2	12	-	-	-
Analog Output (AO)	2	-	6	6	4	2	-	6	6	4
Digital Output (DO)	8 (4 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC)	-	8 (Relay 6A @ 250 VAC)	5 (4 x Relay16A ¹ @ 250 VAC, 1 x Relay 6A @ 24–230 VAC)	7 (5 x Relay 6A @ 250 VAC, 2 x TRIAC 0.5A @ 24–230 VAC)	8 (4 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC)	-	8 (Relay 6A @ 250 VAC)	5 (4 x Relay16A ² @ 250 VAC, 1 x Relay 6A @ 250 VAC)	7 (5 x Relay 6A @ 250 VAC, 2 x TRIAC 0.5A @ 24–230 VAC)
Differential pressure sensor	-	-	-	-	±500 Pa	-	-	-	-	±500 Pa
Connection	Twisted pair	Twisted pair	Twisted pair	Twisted pair	Twisted pair	Ethernet	Ethernet	Ethernet	Ethernet	Ethernet
128x64 graphic display with backlight	■	■	■	■	■	■	■	■	■	■
Ethernet switch	-	-	-	-	-	■	■	■	■	■
Operating conditions	0°C to 50°C, 10–90% RH, noncondensing, degree of protection: IP40, IP20 (terminals)									
Dimensions (L x W x H, mm)	107 x 100 x 75									
Certificates	CE, FCC, LonMark, UL									

1. O29-O40 are internally connected to IO29-IO40 and provide 4-20 mA outputs in parallel to the 0-10 V outputs on IO29-IO40

2. UL: 8A

Product name	L-IOB I/O Modules (BACnet IP)								
Model	LIOB-550	LIOB-551	LIOB-552	LIOB-553	LIOB-554	LIOB-560	LIOB-562		
									
BACnet device profile	B-BC								
Power supply	24 VDC / VAC ±10 % via L-POW, or with an external power supply					24 VDC / 24 VAC ±10 %			
Power consumption	4.5 W (relays on)	4.5 W	4.5 W (relays on)	4.5 W (relays on)	4.5 W (relays on)	4.5 W ²	2.5 W + 0.5 W for each Oxx (max 6 W) ²		
Universal I/O (IO)	-	-	-	-	-	20	40 ¹		
Universal Input (UI)	8	8	6	6	7	-	-		
Digital Input (DI)	2	12	-	-	-	-	-		
Analog Output (AO)	2	-	6	6	4	-	-		
Digital Output (DO)	8 (4 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC)	-	8 (Relay 6A @ 250 VAC)	5 (4 x Relay 16A ³ @ 250 VAC, 1 x Relay 6A @ 250 VAC)	7 (5 x Relay 6A @ 250 VAC, 2 x TRIAC 0.5A @ 24–230 VAC)	-	-		
Differential pressure sensor	-	-	-	-	±500 Pa	-	-		
OPC data points	100					200			
BACnet objects	1 (Per I/O)								
BACnet calendar	10								
BACnet scheduler	5								
Trend logs	10 (130 000 entries, ≈ 2 MB)					20 (260 000 entries, ≈ 4 MB)	40 (520 000 entries, ≈ 8 MB)		
Alarm logs	5								
Connection	Ethernet	Ethernet	Ethernet	Ethernet	Ethernet	Ethernet	Ethernet		
128x64 graphic display with backlight	■	■	■	■	■	■	■		
Ethernet switch	■	■	■	■	■	■	■		
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)								
Dimensions (L x W x H, mm)	107 x 100 x 75						159 x 100 x 75		
Certificates	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL	CE, FCC, BTL		

1. O29-O40 are internally connected to IO29-IO40 and provide 4-20 mA outputs in parallel to the 0-10 V outputs on IO29-IO40

2. Add external load: Sum of max. current drawn from all outputs x 24V

3. UL: 8A

4. U: 0-10V input or 0-10V output, I: 4-20 mA input (only available on UIO 5-8), R: resistance measurement (only available on UIO 1-4)

L-IOB Adapter			
Product name	LIOB-A2	LIOB-A4	LIOB-A5
Model			
Connection	4-wire cables	RJ-45	Terminate the LIOB-Connect bus
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)		
Dimensions (L x W x H, mm)	55 x 100 x 60		27 x 100 x 60
Certificates	CE, FCC	CE, FCC	CE, FCC

LOYCNV Voltage / Current Converter	
Product name	LOYCNV-VA8
Power supply	24 V DC ±10 %
Interfaces	8 x Analog Input (0-10 V) 8 x Analog Output (4-20 mA), burden resistance 250-500 Ohm
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Dimensions	55 x 100 x 60 (L x W x H, mm)
Certificates	CE, FCC

LOYCNV Voltage Converter	
Product name	LOYCNV-PT1008
Power supply	24 V DC ±10 %
Power consumption	approx. 0.7 W
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Input	8x PT1000 (2-wire connection)
Output	8x 0 – 10 V
Dimensions	55 x 100 x 60 (L x W x H, mm)
Certificates	CE, FCC

Relay Interface	
Product name	LOYREL-816
Power supply	24 V DC
Interfaces	8 x Digital Output (16 A Relays) 8 x Digital Input (0/10 V), input 0 V: Relay off, input 10 V: Relay on
Power consumption	up to 3.2 W
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Dimensions (L x W x H, mm)	107 x 100 x 60
Certificates	CE, FCC

Triac Interface	
Product name	L-TRIAC16
Interfaces	16 x Digital Output (0.5 A TRIAC), 24 V AC - 230 V AC 16 x Digital Input (0/10 V), Input 0 V: TRIAC off, Input 10 V: TRIAC on
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Dimensions (L x W x H, mm)	107 x 100 x 60
Certificates	CE, FCC

Product name	L-IOB I/O Controller					
Model	LIOB-585	LIOB-586	LIOB-587	LIOB-588	LIOB-589	LIOB-590
						
BACnet device profile	B-BC					
Power supply	24 VDC / 24 VAC ±10 % via L-POW, or with an external power supply					
CPU	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)
RAM	128 MByte	128 MByte	128 MByte	128 MByte	128 MByte	128 MByte
FLASH	4 GByte	4 GByte	4 GByte	4 GByte	4 GByte	4 GByte
Universal Input (UI)	6	6	6	10	10	-
Digital Input (DI)	-	4	4	-	6	-
Analog Output (AO)	2	-	-	6	6	-
Digital Output (DO)	5 (5 x TRIAC 0.5 A)	6 (6 x Relay 10 A)	6 (6 x Relay 10 A)	8 (8 x Relay 8 A)	4 (4 x Relay 8 A)	-
Universal I/O (IO)	-	-	-	-	-	20
Differential pressure sensor	±500 Pa	-	-	-	-	-
Total number of data points	10000	10000	10000	10000	10000	10000
OPC data points	5000	5000	5000	5000	5000	5000
BACnet objects	1000	1000	1000	1000	1000	1000
BACnet calendar	25	25	25	25	25	25
BACnet scheduler	10	10	10	10	10	10
BACnet notification classes	32	32	32	32	32	32
Trend logs	256 (13 000 000 entries, ≈ 200 MB)					
LonMark calendar	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)
LonMark scheduler	10	10	10	10	10	10
LonMark alarm servers	1	1	1	1	1	1
Modbus data points	300	300	300	300	300	300
L-WEB clients	32	32	32	32	32	32
L-IOB I/O modules	-	1 x LIOB-11x or LIOB-45x/55x/56x	1 x LIOB-11x or LIOB-45x/55x/56x	1 x LIOB-11x or LIOB-45x/55x/56x	1 x LIOB-11x or LIOB-45x/55x/56x	-
Power Measurement	-	-	■	-	-	-
Ethernet switch	■	■	■	■	■	■
128x64 graphic display with backlight	■	■	■	■	■	■
WLAN	■ 1	■ 1	■ 1	■ 1	■ 1	-
EnOcean	■ 1	■ 1	■ 1	■ 1	■ 1	-
MP-Bus	■	■ 1	■ 1	■ 1	■ 1	-
SMI	-	-	-	-	-	-
LTE	■ 1	■ 1	■ 1	■ 1	■ 1	-
IoT	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2
L-STUDIO	■	■	■	■	■	■
Operating conditions	0°C to 50°C, 10–90% RH, noncondensing, degree of protection: IP40, IP20 (terminals)					
Dimensions (L x W x H, mm)	107 x 100 x 75	159 x 100 x 75	159 x 100 x 75	159 x 100 x 75	159 x 100 x 75	107 x 100 x 75
Certificates	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL

1. To operate these protocols, an expansion module is needed and must be ordered separately.

2. To operate IoT functionalities, the L-IOT1 software license is needed and must be ordered separately.

Product name	L-IOB Room Controller						L-IOB I/O Controller						
Model	LIOB-591	LIOB-592	LIOB-593	LIOB-594	LIOB-595	LIOB-596							
													
BACnet device profile	B-BC												
Power supply	85 – 240 V AC, 50 – 60 Hz	24 VDC / 24 VAC ±10 % via L-POW, or with an external power supply											
CPU	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)	A5 (500 MHz)							
RAM	128 MByte	128 MByte	128 MByte	128 MByte	128 MByte	128 MByte							
FLASH	4 GByte	4 GByte	4 GByte	4 GByte	4 GByte	4 GByte							
Universal Input (UI)	-	-	-	-	-	-							
Digital Input (DI)	-	-	-	-	-	-							
Analog Output (AO)	-	-	-	-	-	-							
Digital Output (DO)	1 x TRIAC 1250 W, 230 V AC 3 x TRIAC 300 W, 230 V AC	-	7 (5x Relay 2A, 2x Relay 6A)	7 (5x Relay2A, 2x Relay 6A)	4 (4x Relay 2A)	6 (4x Relay 2A, 2x TRIAC 0.5A)							
Universal I/O (IO)	8 x Universal I/O (U, I, R), ³ 12 x Universal I/O (U) ³	40 ⁴	8xUniversal I/O (U,I,R), 8 x Universal I/O (U) ³	8xUniversal I/O (U,I,R), ³	6 x Universal I/O (U,I,R), ³	8 x Universal I/O (U,I,R), ³							
Differential pressure sensor	-	-	-	-	-	-	±500 Pa						
Total number of data points	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	
OPC data points	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	
BACnet objects	500	500	1000	500	500	500	500	500	500	500	500	500	
BACnet calendar	25	25	25	25	25	25	25	25	25	25	25	25	
BACnet scheduler	10	10	10	10	10	10	10	10	10	10	10	10	
BACnet notification classes	32	32	32	32	32	32	32	32	32	32	32	32	
Trend logs	256 (13 000 000 entries, ≈ 200 MB)												
LonMark calendar	-	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	
LonMark scheduler	-	10	10	10	10	10	10	10	10	10	10	10	
LonMark alarm servers	-	1	1	1	1	1	1	1	1	1	1	1	
Modbus data points	300	300	500	300	300	300	300	300	300	300	300	300	
L-WEB clients	32	32	32	32	32	32	32	32	32	32	32	32	
L-IOB I/O modules	1 x LIOB-45x/55x/56x	-	-	-	-	-	-	-	-	-	-	-	
Integrated DALI bus power supply	16 VDC, 116 mA max. supply current	-	-	-	-	-	-	-	-	-	-	-	
DALI channels	1	-	-	-	-	-	-	-	-	-	-	-	
DALI devices	64	-	-	-	-	-	-	-	-	-	-	-	
Ethernet switch	■	■	■	■	■	■	■	■	■	■	■	■	
128x64 graphic display with backlight	■	■	■	■	■	■	■	■	■	■	■	■	
WLAN	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	
EnOcean	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	
MP-Bus	■ 1	■	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	
SMI	■ 1	-	-	-	-	-	-	-	-	-	-	-	
LTE	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	
IoT	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	■ 2	
L-STUDIO	■	■	■	■	■	■	■	■	■	■	■	■	
Operating conditions	0 °C to 45 °C, 10–90 % RH, noncondensing, degree of protection: IP30, IP20 (terminals)	0 °C to 50 °C, 10–90% RH, noncondensing, degree of protection: IP40, IP20 (terminals)											
Dimensions (L x W x H, mm)	199 x 87 x 62	159 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75	
Certificates	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	CE, FCC, BTL	

1. To operate these protocols, an expansion module is needed and must be ordered separately.

2. To operate IoT functionalities, the L-IOT1 software license is needed and must be ordered separately.

3. U: 0-10V input or 0-10V output, I: 4-20 mA input, R: resistance measurement

4. O29-O40 are internally connected to IO29-IO40 and provide 4-20 mA outputs in parallel to the 0-10 V outputs on IO29-IO40

Product name	Gateways						
Model	LGATE-952	LGATE-902	LINX-102	LINX-103	LINX-202	LINX-203	
							
BACnet device profile	B-BC	B-BC	-	-	B-BC	B-BC	
Power supply	24 VDC / 24 VAC ± 10%, typ. 2.5 W						
CPU	Quad-core ARM Cortex-A53 @ 1.1GHz						
RAM/FLASH	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	
LIOB-Connect	-	-	■	■	■	■	
TP / FT-10 ports	1	1	1	1	-	-	
RS-485 ports	2	1	1	1	2	2	
Extension ports	3	1	1	1	1	1	
Total number of data points	30000	10000	10000	10000	10000	10000	
OPC data points	5000	2000	2000	2000	2000	2000	
BACnet objects	2000	2000	-	-	750	750	
BACnet client mappings	1000	750	-	-	750	750	
BACnet calendar	25	25	-	-	25	25	
BACnet scheduler	100	100	-	-	100	100	
BACnet notification classes	32	32	-	-	32	32	
Trend logs	512 (13 000 000 entries, ≈ 200 MB)		256 (13 000 000 entries, ≈ 200 MB)				
LonMark calendar	1 (25 calendar patterns)		1 (25 calendar patterns)	1 (25 calendar patterns)	1 (25 calendar patterns)	-	-
LonMark scheduler	100	100	100	100	-	-	
LonMark alarm servers	1	1	1	1	-	-	
L-WEB clients	32	32	32	32	32	32	
L-IoB I/O modules	-	-	Up to 8 (LIOB-Connect, LIOB-FT and LIOB-IP852)			Up to 8 (LIOB-Connect, LIOB-FT and LIOB-55x)	
IEC-61131	-	-	-	-	-	-	
IEC-61499	-	-	-	-	-	-	
CEA-709 Router	-	-	-	■	-	-	
CEA-709 RNI	■	■	■	-	-	-	
CEA-709 (FT)	■ 1	■ 1	■ 1	■	-	-	
CEA-852 (IP)	■ 1	■ 1	■ 1	■	-	-	
BACnet Router	-	-	-	-	-	■	
BACnet MS / TP	■ 2	■ 2	-	-	■ 2	■	
BACnet IP	■ 2	■ 2	-	-	■ 2	■	
BBMD	■	■	-	-	-	■	
Modbus RTU/ASCII	■	■ 3	■	■	■ 3	■ 3	
Modbus IP	■	■	■	■	■	■	
M-Bus	■ 4	■ 4	■ 4	■ 4	■ 4	■ 4	
KNX TP1	■ 4	■ 4	■ 4	■ 4	■ 4	■ 4	
MP-BUS	■ 5	■ 5	■ 5	■ 5	■ 5	■ 5	
KNX IP	■ 4	■ 4	■	■	■	■	
SMI	■ 5	■ 5	■ 5	■ 5	■ 5	■ 5	
EnOcean	■ 5	■ 5	■ 5	■ 5	■ 5	■ 5	
OPC XML-DA Client/Server	■	■	■	■	■	■	
OPC UA Server	■	■	■	■	■	■	
SNMP	■	■	■	■	■	■	
128 x 64 graphic display with backlight	■	■	■	■	■	■	
USB	■	■	■	■	■	■	
Ethernet switch	■	■	■	■	■	■	
WLAN	■ 5	■ 5	■ 5	■ 5	■ 5	■ 5	
LTE	■ 5	■ 5	■ 5	■ 5	■ 5	■ 5	
IoT	■	■	■ 6	■ 6	■ 6	■ 6	
SSH, HTTPS, Firewall	■	■	■	■	■	■	
LIOB FT + IP	-	-	■	■	■	■	
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)						
Dimensions (LxWxH, mm)	159 x 100 x 75		107 x 100 x 75				
Certificates	CE, FCC, BTL, UL		CE, FCC, BTL, UL	CE, FCC, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	

1. This model can be configured to have either FT or IP active for CEA-709.
 2. This model can be configured to have either MS / TP or IP active for BACnet.

3. Modbus RTU/ASCII can only be used if BACnet MS / TP is not active on this model.

4. M-Bus and KNX TP1 can be used alternatively only on this model. To operate these protocols, an expansion module is needed and must be ordered separately.

5. To operate these protocols, an expansion module is needed and must be ordered separately.
 6. To operate IoT functionalities, the L-IOT1 software license is needed and must be ordered separately.

Product name	L-VIS Touch Panels								
Model	LVIS7-32G1	LVIS7-32G2	LVIS12-32G1	LVIS12-32G2	LVIS12-32G3	LVIS15-32G1	LVIS15-32G2	LVIS15-32G3	
									
Power supply	PoE class 4 24 VDC ±10%, 2.5 W Backlight on: 5 W		PoE class 4 24 V DC ±10 %, 4 W, backlight on: 10 W or 85-240 V AC, 7 W, backlight on: 13 W			PoE class 4 24 V DC ±10 %, 4 W, backlight on: 10 W or 85-240 V AC, 7 W, backlight on: 13 W			
Screen size	7"	7"	12.1"	12.1"	12.1"	15"	15"	15"	
Touch display	Capacitive touch								
Display resolution	1024 x 600, 16.7 million colors		1024 x 768, 16.7 million colors						
Panel material	Frameless glass								
Color	Silver	Black	Silver	Black	White	Silver	Black	White	
BACnet	■	■	■	■	■	■	■	■	
CEA-709	■	■	■	■	■	■	■	■	
OPC XML-DA server	■	■	■	■	■	■	■	■	
OPC XML-DA clients	■	■	■	■	■	■	■	■	
OPC UA server	■	■	■	■	■	■	■	■	
OPC data points	10000	10000	10000	10000	10000	10000	10000	10000	
Modbus data points	2000	2000	2000	2000	2000	2000	2000	2000	
VNC clients	16	16	16	16	16	16	16	16	
Alarming	■	■	■	■	■	■	■	■	
Scheduling	■	■	■	■	■	■	■	■	
Trending	■	■	■	■	■	■	■	■	
Web server	■	■	■	■	■	■	■	■	
Ethernet ports	2	2	2	2	2	2	2	2	
TP / FT-10 ports	1	1	1	1	1	1	1	1	
RS-485 ports (Modbus / BACnet)	1	1	1	1	1	1	1	1	
Digital Input (DI)	2	2	2	2	2	2	2	2	
Speaker and audio output	■	■	■	■	■	■	■	■	
Mounting frame	■	■	■	■	■	■	■	■	
WLAN	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	
LTE	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	
Operating conditions	10°C to 40°C, 10-90% RH, noncondensing								
Dimensions (L x W x H, mm)	223.5 x 162 x 65		333 x 272.5 x 65			394 x 318 x 65			
Dimensions cut-out (L x W x H, mm)	195 x 143 x 61		300 x 250 x 61			355 x 295 x 61			
Certificates	CE, FCC, BTL, UL								

1. To operate these protocols, an expansion module is needed and must be ordered separately.

Product name	L-STAT Room Control Unit					
Model LSTAT-80x-G3-Lx	LSTAT-800-G3-L1 LSTAT-801-G3-L1 LSTAT-802-G3-L1	LSTAT-800-G3-L2 LSTAT-801-G3-L2 LSTAT-802-G3-L2	LSTAT-800-G3-L3 LSTAT-801-G3-L3 LSTAT-802-G3-L3	LSTAT-800-G3-L4 LSTAT-801-G3-L4 LSTAT-802-G3-L4	LSTAT-800-G3-L5 LSTAT-801-G3-L5 LSTAT-802-G3-L5	LSTAT-800-G3-L6 LSTAT-801-G3-L6 LSTAT-802-G3-L6
Black Front, White Enclosure						
Model LSTAT-80x-G3-L20x	LSTAT-800-G3-L201 LSTAT-801-G3-L201 LSTAT-802-G3-L201	LSTAT-800-G3-L202 LSTAT-801-G3-L202 LSTAT-802-G3-L202	LSTAT-800-G3-L203 LSTAT-801-G3-L203 LSTAT-802-G3-L203	LSTAT-800-G3-L204 LSTAT-801-G3-L204 LSTAT-802-G3-L204	LSTAT-800-G3-L205 LSTAT-801-G3-L205 LSTAT-802-G3-L205	LSTAT-800-G3-L206 LSTAT-801-G3-L206 LSTAT-802-G3-L206
White Front, White Enclosure						
Display	LCD display with backlight and choice of RGB color					
RS-485 ports	1	1	1	1	1	1
Button	4	6	8	8	8	8
Power supply	24 VDC ±10%, 1 W					
Buzzer	1	1	1	1	1	1
Internal temperature sensor	1	1	1	1	1	1
Internal relative humidity sensor	1	1	1	1	1	1
Digital Input (DI)	3	3	3	3	3	3
Universal Input (UI)	1	1	1	1	1	1
Motion detection, occupancy, Infrared receiver	1 (LSTAT-801-GX-LX and LSTAT-802-GX-LX)					
CO ₂ sensor	1 (LSTAT-802-GX-LX)					
EnOcean	optional for L-STAT-CUSTOM					
Operating conditions	0°C to 50°C, 10–90% RH, noncondensing					
Dimensions (L x W x H, mm)	94.5 x 110 x 19.5					
Certificates	CE, FCC, UL					

Buttons (capacitive touch)

LSTAT-80x-Gx-Lxx1: 4 x Button with temperature up/down, occupancy, and menu

LSTAT-80x-Gx-Lxx2: 6 x Button with temperature up/down, fan up/down, occupancy, and menu

LSTAT-80x-Gx-Lxx3: 8 x Button with temperature up/down, fan up/down, light on/off, occupancy, and menu

LSTAT-80x-Gx-Lxx4: 8 x Button with temperature up/down, sunblinds up/ down, light on/off, occupancy, and menu

LSTAT-80x-Gx-Lxx5: 8 x Button with temperature up/ down, fan up/ down, sunblinds up/ down, occupancy, and menu

LSTAT-80x-Gx-Lxx6: 8 x Button with temperature up/ down, fan up/ down, sunblinds up/ down, light, and menu

Product name	LPAD-7 Touch Panel		LPAD-7 Touch Panel / Programmable Controller			
Model	LPAD7-30G2	LPAD7-30G3	LPAD7-31G2	LPAD7-31G3	LPAD7-41G2	LPAD7-41G3
						
	Black Front	White Front	Black Front	White Front	Black Front	White Front
CPU	Quad-core ARM Cortex-A53 @ 1.1GHz		Quad-core ARM Cortex-A53 @ 1.1GHz		Quad-core ARM Cortex-A53 @ 1.1GHz	
RAM	1 GByte		1 GByte		1 GByte	
FLASH	8 GByte		8 GByte		8 GByte	
Power supply		PoE class 3, 24 V DC ±10 %, 3 W, backlight on: 6 W				
Display		7" IPS, 1024 x 600, 16.7 million colors, capacitive touch				
OPC XML-DA server	■		■		■	
OPC XML-DA clients	■		■		■	
OPC UA server	■		■		■	
OPC data points	10000		10000		10000	
Modbus data points	-		2000		2000	
VNC clients	16		16		16	
AST	■		■		■	
Web server	■		■		■	
Ethernet ports	2		2		2	
PoE Class 3	■		■		■	
Speaker	■		■		■	
TOF proximity sensor	■		■		■	
Temperature/Humidity	■		■		■	
Lux sensor	■		■		■	
IR receiver	■		■		■	
Microphone	-		-		■	
WLAN	■		■		■	
Bluetooth	■		■		■	
BACnet/IP, BACnet/SC	-		■		■	
BACnet MS/TP	-		■ 1		■ 1	
LonMark IP-852 ²	■ 2		■ 2		■ 2	
LonMark TP/FT-10 ²	■ 2		■ 2		■ 2	
Modbus TCP	-		■		■	
Modbus RTU/ASCII	-		■ 1		■ 1	
EnOcean	■ 3		■ 3		■ 3	
IoT, Node.js, Node-RED	-		■		■	
IEC 61499 / IEC 61131-3 programming	-		■		■	
Degree of protection		IP20				
Operating conditions		+10 °C to 45 °C, 10-90 % RH, noncondensing				
Dimensions		180 x 112.2 x 21 (L x W x H, mm)				
Certificates	CE, FCC		CE, FCC, BTL		CE, FCC, BTL	

Product name	LPAD7-SOCKETx Mounting Sockets					
Model	LPAD7-SOCKET0	LPAD7-SOCKET1	LPAD7-SOCKET2	LPAD7-SOCKET3	LPAD7-SOCKET4	LPAD7-SOCKET5
						
Power supply	24 V DC supply	24 V AC/DC supply	24 V AC/DC supply	24 V AC/DC supply	24 V AC/DC supply	24 V AC/DC supply
RS-485	-	■	■	■	■	-
Universal I/O (IO)	-	7	-	-	-	-
Relays	-	6 Relays 2 A, 24 V	-	-	-	-
LonMark TP/FT-10	-	-	■	-	-	-
EnOcean	-	-	-	868 MHz	902 MHz	-
Interfaces	-	-	3 x digital input (dry contact, not protected against overvoltage)			-
Certificates	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, BTL, UL	CE, FCC, EnOcean certified	CE, FCC, EnOcean certified	CE, FCC, BTL, UL

1. Needs LPAD7-SOCKET1, LPAD7-SOCKET2, LPAD7-SOCKET3 or LPAD7-SOCKET4 - must be ordered separately.

2. Needs LPAD7-SOCKET2 - must be ordered separately.

3. Needs LPAD7-SOCKET3, or LPAD7-SOCKET4 - must be ordered separately.

L-DALI Controller			
Model	LDALI-3E101-U	LDALI-3E102-U	LDALI-3E104-U
Power supply	85-240 V AC, 50/60 Hz, typ. 9 W (4 W + 5 W DALI)	85-240 V AC, 50/60 Hz, typ. 14 W (4 W + 2 x 5 W DALI)	85-240 V AC, 50/60 Hz, typ. 14 W (4 W + 4 x 2.5 W DALI)
CPU	Quad-core ARM Cortex-A53 @ 1.1GHz		
RAM/FLASH	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB
DALI channels	1	2	4
Integrated DALI bus power supply (per channel data)	16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current		16 VDC, 116 mA guaranteed supply current, 125 mA max. supply current
OPC data points	10000	10000	10000
128x64 graphic display with backlight	■	■	■
BACnet Server Objects	-	-	-
CEA-709 Local NVs	1000	2000	4000
OPCXML-DA + UA Server	■	■	■
DALI ballasts per DALI channel	64		
DALI groups per DALI channel	16		
DALI sensor per DALI channel	16		
Scene control	16 scenes per DALI group		
Alarm logs	10		
Scheduler	16 per DALI channel (LonMark)		
Trend logs	512 (13 000 000 entries, ≈ 200 MB)		
Local and Global connections	2000 / 250		
L-WEB clients	32 (simultaneously)		
Ethernet ports	2		
TP / FT-10 ports	1		
BACnet MS / TP ports	-	-	-
WLAN	■ 1	■ 1	■ 1
LTE	■ 1	■ 1	■ 1
L-STUDIO	-	-	-
IoT	■	■	■
Operating conditions	0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)		
Dimensions	159 x 100 x 75 (L x W x H, mm)		
Certificates	DALI-2, CE, FCC, UL	DALI-2, CE, FCC, UL	DALI-2, CE, FCC, UL

L-DALI Power Supply			
Model	LDALI-PWR1-U	LDALI-PWR2-U	LDALI-PWR4-U
Power supply	85-240 VAC, 50 / 60 Hz	85-240 VAC, 50 / 60 Hz	85-240 VAC, 50 / 60 Hz
Product descriptions	DALI power supply unit for 1 DALI channels	DALI power supply unit for 2 DALI channels	DALI power supply unit for 4 DALI channels
Operating conditions	0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)		
DALI supply current guaranteed / max	1 x 50mA / 62mA	2 x 116mA / 125mA	4 x 116mA / 125mA
Dimensions	51 x 41 x 21 (L x W x H)	107 x 100 x 75 (L x W x H, mm)	
Certificates	DALI-2, CE, FCC	DALI-2, CE, FCC, UL	DALI-2, CE, FCC, UL

1. To operate these protocols, an expansion module is needed and must be ordered separately.

Product name		L-DALI Controller				
Model	LDALI-ME201-U	LDALI-ME202-U	LDALI-ME204-U	LDALI-PLC2	LDALI-PLC4	
						
Power supply	85-240 V AC, 50/60 Hz, typ. 9W (4W + 5W DALI)	85-240 VAC, 50/60 Hz, typ. 14W (4W + 2 x 5 W DALI)	85-240 V AC, 50/60 Hz, typ. 14W (4W + 4 x 2.5W DALI)	85-240 V AC, 50/60 Hz, typ. 14W (4W + 2 x 5W DALI)	85-240 V AC, 50/60 Hz, typ. 14W (4W + 4 x 2.5W DALI)	
CPU	Quad-core ARM Cortex-A53 @ 1.1GHz					
RAM/FLASH	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	1 GB / 8 GB	
DALI channels	1	2	4	2	4	
Integrated DALI bus power supply (per channel data)	16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current	16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current	16 VDC, 116 mA guaranteed supply current, 125 mA max. supply current	16 V DC, 230 mA guaranteed supply current, 250 mA max. supply current	16 V DC, 116 mA guaranteed supply current, 125 mA max. supply current	
OPC data points	10000	10000	10000	10000	10000	
128x64 graphic display with backlight	■	■	■	■	■	
BACnet Server Objects	1000	2000	4000	2000	2000	
CEA-709 Local NVs	-	-	-	1000	1000	
OPCXML-DA + UA Server	■	■	■	■	■	
DALI ballasts per DALI channel	64					
DALI groups per DALI channel	16					
DALI sensor per DALI channel	16					
Scene control	16 scenes per DALI group					
Alarm logs	10					
Scheduler	25 per DALI channel (BACnet)			25 per DALI channel (LonMark), 25 per DALI channel (BACnet)		
Trend logs	512 (13 000 000 entries, ≈ 200 MB)					
Local and Global connections	2000 / 250					
L-WEB clients	32 (simultaneously)					
Ethernet ports	2					
TP / FT-10 ports	-					
BACnet MS / TP ports	1	1	1	1	1	
WLAN	■ 1	■ 1	■ 1	■ 1	■ 1	
LTE	■ 1	■ 1	■ 1	■ 1	■ 1	
L-STUDIO	-	-	-	■	■	
IoT	■	■	■	■	■	
Operating conditions	0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)					
Dimensions	159 x 100 x 75 (L x W x H, mm)					
Certificates	DALI-2, CE, FCC, BTL, UL	DALI-2, CE, FCC, BTL, UL	DALI-2, CE, FCC, BTL, UL	DALI-2, CE, FCC, BTL, UL	DALI-2, CE, FCC, BTL, UL	

Product name		L-DALI Phase-Cut Dimmer Module	
Model	LDALI-PD1		
Power supply	220-240 V AC, 50/60Hz		
Product descriptions	DALI phase-cut dimmer module		
Number of devices	64 per DALI channel, with sufficient dimensioned DALI bus power supply		
Operating conditions	0°C – 50°C, 10 – 90% RH, non-condensing, degree of protection: IP20		
Dimensions (mm)	51 x 41 x 21		
Certificates	DALI-2, CE, FCC		

¹. To operate these protocols, an expansion module is needed and must be ordered separately.

Product name	L-DALI Multisensors				
Model	LDALI-MS2-BT	LDALI-MS3-BT	LDALI-MS4-BT		
					
Power supply	DALI bus, 6 mA / 10 mA at 16 V DC (Bluetooth disabled/enabled), max. 10mA (inrush current)				
Product descriptions	Multi-sensor with motion detection, lux level measurements and Bluetooth		Multi-sensor with motion detection, lux level measurements, flat lens and Bluetooth		
Dimensions (mm)	Total Ø: 104 flush-mounted Ø: 60 mounting depth: 30	Total Ø: 68 mounting hole Ø: 60 mounting depth: 42			
Installation	Ceiling mount: • Direct installation in false ceilings (spring mount included) • Flush-mounted installation • On-wall (mounting kit LOYMS2-OW must be ordered separately)				
Number of LDALI-MSx-BT	16 per DALI channel, with sufficient dimensioned DALI bus power supply				
Lux level measurement	0 – 4000 lux, resolution: 0.125 lux				
Mounting height	max. 12 m		max. 5 m		
Passive infrared motion detector	10.8 m @ 3m mounting height (92m ²), 136 zones, opening angle: 122° (up to 5 m mounting height) Highbay-application: 5 m – 12 m mounting height, detection area: 256 m ² (opening angle: 73.6° @ 12 m, 122° @ 5 m)		7.2 m @ 3 m mounting height (44 m ²), 156 zones, opening angle: 100° (up to 5 m mounting height)		
Bluetooth	■	■	■		
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP20				
Certificates	DALI-2, CE, FCC	DALI-2, CE, FCC	DALI-2, CE, FCC		

Product name	Infrared Remote controller	Product name	L-DALI Pushbutton Coupler
Model	L-RC1	Model	LDALI-BM2
			
Power supply	1 x CR2025 3.0 V button battery	Power supply	DALI bus 3.5 mA at 16 V DC, max. 6 mA (inrush current)
Product descriptions	Infrared remote control for room automation applications	Product descriptions	Quadruple pushbutton coupler
Keys	18	Number of devices	64 per DALI channel, with sufficient dimensioned DALI bus power supply
Operating conditions	0°C to 40°C, 10–90% RH, noncondensing	Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP20
Dimensions	40.5 x 86.4 x 7.20 (L x W x H, mm)	Dimensions	45.8 x 37.8 x 13.5 (L x W x H, mm)
Certificates	CE, FCC	Certificates	DALI-2, CE, FCC

Product name	L-DALI PWM module		
Model	LDALI-PWM4	LDALI-PWM4-TC	LDALI-PWM4-RGBW
Power supply	12 - 24 V DC +10%		
Product descriptions	PWM module, DALI, 4 x 3 A LED outputs, 24 V DC ext.	PWM module tunable white, DALI, 4 x 3 A LED outputs, 24 V DC ext.	PWM module RGBW, DALI, 4 x 3 A LED outputs, 24 V DC ext.
Number of devices	up to 16 per DALI channel	up to 32 per DALI channel	up to 64 per DALI channel
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP20		
Dimensions (mm)	51 x 41 x 21		
Certificates	DALI-2, CE, FCC	DALI-2, CE, FCC	CE, FCC

Product name	L-DALI Sunblind Module		
Model	LOY-DALI-SBM1		
Power supply	DALI-bus, idle 3.5 mA (@16 V DC) / typ. 6 mA (@ 16 V DC) / max. 11 mA inrush current		
Product descriptions	DALI Sunblind Module, DALI, 2 x 6A/250 V AC		
Number of devices	64 per DALI channel, with sufficient dimensioned DALI bus power supply		
Maximum switching power	1500 VA @ 250 V AC / 180 W @ 30 V DC		
Nominal switching capacity	6A @ 250 V AC / 6A @ 30 V DC / inrush currents up to 10A		
Relay contact switching voltage	250 V AC / 30 V DC		
Interfaces	1 x DALI, protected against overvoltage (mains)		
Bluetooth	-		
Bluetooth protocol conformance	-		
Bluetooth & RF characteristics	250 V AC / 30 V DC		
Terminal blocks	Push Terminals		
Dimensions (mm)	51 x 41 x 21		
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)		
Certificates	DALI-2, CE, FCC		

Product name	L-DALI Relay module		
Model	LDALI-RM5	LDALI-RM6	LDALI-RM8
Power supply	DALI bus, idle 3.5 mA / 3 mA (1-10 V connected / not connected) (@16 V DC), typ. 6 mA (@16 V DC), max. 11 mA (inrush current)		85 – 240 V AC or 24 V DC ±10 %, typ. consumption: < 1 W
Product descriptions	DALI Relay Module 10 A, Analog Interface 1 – 10 V		DALI Relay Module, 8-channel
Number of devices	64 per DALI channel, with sufficient dimensioned DALI bus power supply		max. 8 per DALI channel
Current AC	10 A, 120 V AC; 10 A, 120 V AC; 8 A, 277 V AC; 6 A, 347 V AC		16 A
Current DC	10 A, 30 V DC		16 A, 30 V DC
Relay contact switching voltage	120 - 347 V AC / 30 V DC		120-277 V AC / 30 V DC
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP20		0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Dimensions	51 x 41 x 21 (L x W x H, mm)		159 x 100 x 75 (L x W x H, mm)
Certificates	DALI-2, CE, FCC		DALI-2, CE, FCC

Product name	L-IP CEA-709 / IP-852 Router					L-IP BACnet IP Router		
Model	LIP-3ECTC	LIP-1ECTC	LIP-13ECTC	LIP-33ECTC	LIP-333ECTC	LIP-ME201C	LIP-ME202C	LIP-ME204C
								
Power supply	24 V AC / DC ±10%							
CPU	Quad-core ARM Cortex-A53 @ 1.1GHz							
RAM/FLASH	1 GB / 8 GB							
OPC XML-DA server	■	■	■	■	■	■	■	■
OPC UA server	■	■	■	■	■	■	■	■
Ethernet ports	2	2	2	2	2	2	2	2
TP / FT-10 ports	1	-	1	2	4	-	-	-
TP / XF-1250 ports	-	1	1	-	-	-	-	-
BACnet MS / TP ports	-	-	-	-	-	1	2	4
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)							
Dimensions (L x W x H, mm)	107 x 100 x 60				159 x 100 x 75	107 x 100 x 75		159 x 100 x 75
Certificates	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL	CE, FCC,BTL, UL	CE, FCC, BTL, UL	CE, FCC, UL
USB ports	2	2	2	2	2	2	2	2
WLAN	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1
LTE	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1	■ 1
Product name	NIC for CEA-709 and IP-852 Channels							
Model	NIC852	NIC709-USB100	NIC709-IP3E100C	NIC709-IP1E100C	NIC709-IP4E100C	NIC852-SW		
								
Power supply	USB interface	USB interface	24 V AC / DC ±10%					-
CPU	-	-	Quad-core ARM Cortex-A53 @ 1.1GHz					-
RAM/FLASH	-	-	1 GB / 8 GB					-
Product description	Floating license via USB hardlock key	USB interface, connects to the USB port of a PC	Remote Network Interface (RNI)			Software license for one PC, connect to IP-852 channel		
Ethernet ports	-	-	2	2	2			-
TP / FT-10 ports	-	1	1	-	-			-
TP / XF-1250 ports	-	1	-	1	-			-
TP/ RS-485 ports	-	1	-	-	-	1		-
USB ports	1	1	2	2	2			-
SNMP	-	-	■	■	■			-
WLAN	-	-	■ 1	■ 1	■ 1			-
LTE	-	-	■ 1	■ 1	■ 1			-
Operating conditions	-	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)						-
Dimensions (L x W x H, mm)	-	104.4 x 66.5 x 25.5	107 x 100 x 75	107 x 100 x 75	107 x 100 x 75			-
Certificates	CE, FCC	CE, FCC	CE, FCC	CE, FCC	CE, FCC	CE, FCC		-
Operating System	Windows 10, Windows 11, Windows Server 2016, Windows Server 2019, Windows Server 2022							
Product name	LPA CEA-709 Protocol Analyzer							
Model	LPA-SET-USB	LPA-IP	LPA-SW	LPA-IP-SW	LPA-USB			
								
Product description	Set contains: Network interface NIC709-USB100 and NIC852 for IP-852 / CEA-709 channels, registered to NIC852 / NIC709-USB100	IP-852 Channel Protocol Analyzer bundle contains: Network interface NIC852 for IP-852 channels, registered to NIC852	Protocol Analyzer Software, supports all NIC-709 network interfaces, NIC709 not included	Protocol Analyzer Software for IP-852 channels, supports Remote LPA. NIC852 not included.	Set contains: Network Interface NIC709-USB100 LPA-SW Protocol Analyzer Software for CEA-709 channels, registered to NIC709-USB100			
Operating System	Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit), Windows Server 2008, Windows Server 2012, Windows Server 2016, Windows Server 2019							

1. To operate these protocols, an expansion module is needed and must be ordered separately.

Product name	M-Bus Interface	
Model	L-MBUS20	L-MBUS80
		
Power supply	24 V AC / DC ±10%	
Baud rate	300 to 9600 baud	300 to 9600 baud
TTL / RS-232	1	1
M-Bus	1	1
M-Bus devices	Up to 20	Up to 80
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)	
Dimensions (L x W x H, mm)	107 x 100 x 60	
Certificates	CE, FCC	CE, FCC

Product name	EnOcean Interface		
Model	LENO-800	LENO-801	LENO-802
			
Power supply	Via the USB 2.0 BUS Connection		
Frequency	868.3 MHz	902.875 MHz	928.35 MHz
Installation	Standard USB 2.0 cable, max 5 M		
Data rate	125 kbit/s		
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)		
Versions	Europe	USA / Canada	Japan
Dimensions (L x W x H, mm)	27 x 89 x 60		
Certificates	CE, FCC	CE, FCC	CE, FCC

Product name	Wireless LAN Interface	
Model	LWLAN-800	
		
Power supply	via the USB 2.0 bus connection	
Installation	standard USB 2.0 cable, max 5 M	
USA (FCC)	2.412~2.462 GHz / 11 channels	
Europe (ETSI)	2.412~2.472 GHz / 13 channels	
Japan	2.412~2.472 GHz / 13 channels	
Frequency	2.4 GHz band	
Standard	IEEE 802.11 b/g/n	
RF output power	max. 18 dBm (63 mW) ±2 dBm	
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)	
Dimensions (L x W x H, mm)	27 x 89 x 60	
Certificates	CE, FCC, IC	

Product name	LTE Interface	
Model	LTE-800	
		
Power supply	24 V DC, typ 4.5 W	
Installation	standard USB 2.0 cable, max 5 M	
Standard	LTE, UMTS/HSPA+ and GSM/GPRS/EDGE	
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)	
Dimensions (L x W x H, mm)	55 x 100 x 60	
Certificates	CE, FCC	

Product name	KNX TP1 Interface	
Model	LKNX-300	
		
Power supply	via KNX TP1 bus	
Baud rate	9600 baud	
Installation	3-wire cable, max 1 M	
EXT ports	1	
KNX TP1 ports	1	
Number of KNX TP1 data points	1000	
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)	
Dimensions (L x W x H, mm)	55 x 100 x 60	
Certificates	CE, FCC	

Product name	MP-Bus Interface	
Model	LMPBUS-804	
		
Power supply	24 V DC	
Interfaces	1 x Mini USB 2.0 Type B	
MP-Bus	4	
Operating conditions	0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)	
Dimensions (L x W x H, mm)	55 x 100 x 60	
Certificates	CE, FCC	

Product name	Standard Motor Interface, SMI	
Model	LSMI-800	LSMI-804
Product description	Standard Motor Interface for 16 motors via EXT port	Standard Motor Interface for 64 motors, 4 SMI channels via USB
Power supply	230 VAC, 50 Hz, max 2 W	85-240 VAC, 50/60 Hz, max 2W
Installation	3-wire cable, max 1 M	standard USB 2.0 cable, max 1 M
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)	
Dimensions (L x W x H, mm)	55 x 100 x 60	107 x 100 x 60
Certificates	CE, FCC	

Product name	RS-232 Interface
Model	LRS232-802
Power supply	Via the USB 2.0 bus connection
Installation	DIN rail mounting following DIN 43880, top hat rail EN 50022 Connected with a standard USB 2.0 cable, max. 0.5 m
Interfaces	1 x Mini USB 2.0 Type B 2 x RS-232 ports: Modbus ASCII (Master or Slave) or custom serial protocols (requires L-IOT1 license)
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Dimensions (L x W x H, mm)	27 x 89 x 60
Certificates	CE, FCC

Product name	Dual Single-Pair-Ethernet Converter
Model	LOY-SPE2
Power supply	24 V DC / V AC SELV ±10 % via LPOW-2415B, or with an external power supply
Installation	DIN rail mounting following DIN 43880, top hat rail EN 50022
Power consumption	1.2 W
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals)
Dimensions (L x W x H, mm)	27 x 89 x 60
Certificates	CE, FCC

Product name	Network Terminator				
Model	LT-03	LT-13	LT-33	LT-04	LT-B4
					
Power supply	-	-	-	-	24 VDC or 24 VAC ±10%
RJ-45 ports	1	-	-	1	-
TP / FT-10 ports	1	1	2	-	-
TP / XF-1250 ports	-	1	-	-	-
RS-485	-	-	-	1	1
Operating conditions	0°C to 50°C, 10–90% RH, noncondensing				
Dimensions (L x W x H, mm)	27 x 89 x 60				
Certificates	CE, FCC	CE, FCC	CE, FCC	CE, FCC	CE, FCC

RS-485 standard: ANSI/TIA/EIA-485

Product name	L-POW Power Supply			Product name	System Distribution Box		
Model	LPOW-2415A	LPOW-2415B	LPOW-2460B	Model	LBOX-600	LBOX-ROC1	LBOX-ROC2
							
Input voltage	85–240 VAC, 50–60 Hz			Material	Galvanized steel		
Supply voltage	24 V DC 15 W	24 V DC 15 W	24 V DC 60 W	Application	Room automation components	System distribution box for LROC-40x Room Controller	
Connection	via LIOB-Connect	Connector	Connector	Dimensions (L x W x H, mm)	600 x 250 x 82	519 x 280 x 71	
Dimensions (L x W x H, mm)	55 x 100 x 60		71 x 91 x 55	Input voltage	-	100 – 240 VAC, 50 – 60 Hz	
Certificates	CE, FCC, UL		CE, FCC	Supply voltage	-	24 VDC 60 W	

Product name	L-ACT Actuators		
Model	L-ACT101-MP	L-ACT101-MP	L-ACT-FRAME1
			
Dimensions (L x W x H, mm)	116 x 66 x 63	116 x 66 x 63	214 x 68 x 118
Shaft diameter (inches)	5/8"	3/4"	-
Certificates	CE, FCC, UL		-

Product name	Ethernet Switch		
Model	LOYDVS-110W02-3SFP Managed 10-Port Ethernet Switch	LOYDVS-008I00 Unmanaged 8-Port Fast Ethernet	
			
Dimensions (L x W x H, mm)	75 x 108.7 x 145.3 (L x W x H)		45 x 108.7 x 145.3 (L x W x H)
Installation	Industrial DIN-Rail and wall mounting		Industrial DIN-Rail and wall mounting
Certificates	CE, FCC, UL		

Product name	DVP Modbus I/O Extension	
Model	LOYDVP16SM11N I/O Extension Module	LOYRTU-485 Remote I/O Communication Module
		

Dimensions (L x W x H, mm)	25.2 x 60 x 96 (L x W x H)	25.2 x 60 x 96 (L x W x H)
Installation	Industrial DIN-Rail and wall mounting	Industrial DIN-Rail and wall mounting
Certificates	CE, FCC, UL	

Product name	Indoor air quality sensor
Model	LOYUNO-L
	

Dimensions (mm)	141.91 x 42 x 67.91 (L x W x H)
Installation	Drywall mount, Electrical box mount, wall mount cradle
Power supply	source 1: 12-24 VDC, 24 VAC source 2: power adapter 12V/1A 6W max. (12VDC)
Bluetooth & RF-characteristics	Maximum output power: 0 dBm Frequency range: 2402-2480 MHz
Operating conditions	0 °C to 50 °C, 10 – 90 % RH
Interfaces	Modbus RTU / BACnet MS/TP (Select via DIP switch)
Certificates	CE, FCC, UL
For use with	Bluetooth Mesh enabled LOYTEC devices (e.g. LPAD-7)

Product name	LOYBT Temperature Sensor
Model	LOYBT-TEMP1
	

Power supply	Battery powered (CR2032), expected battery life time: 2 years
Product descriptions	Bluetooth Mesh temperature sensor
Interfaces	1x Bluetooth Mesh (low power node) 1x Button (digital input) 1x Led (optical feedback)
Installation	Wall mounted (screw or adhesive tape)
Sensor Data Update	Periodically: 5 minutes interval Change of Temperature Value: >0.5° since last publication
Bluetooth & RF-characteristics	Maximum output power: +4 dBm Frequency range: 2402-2480 MHz
Bluetooth protocol conformance	Bluetooth 5.1 Declaration ID: D060851 contains qualified designs: 150092 (controller subsystem), 176697 (host subsystem) and 178269 (mesh profile subsystem)
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP20
For use with	Bluetooth Mesh enabled LOYTEC devices (e.g. LPAD-7)

Soluções inteligentes para automação de Edifícios.

totalmente integrado - perfeitamente conectado - com segurança em rede



Nos nossos dias a automação de edifícios é caracterizada pela integração de múltiplos sistemas e o uso das sinergias resultantes.

A habilidade de maximizar a eficiência energética enquanto se maximiza a flexibilidade e o conforto, é primordial para os edifícios de hoje. A transparência em consumo energético e custo são requisitos para detetar imediatamente qualquer debilidade e desenvolver ativamente processos de melhoria.

LOYTEC estabelece o objetivo de transformar esses requisitos nas melhores soluções de produto possíveis. O resultado é um portfolio de produtos inovadores, consistentes e coordenados. Deste modo LOYTEC confia em protocolos de comunicação abertos enfatizando em comunicação via Ethernet/IP e WLAN/IP para assegurar uma ligação fácil à Intranet/Internet. LOYTEC foca-se em standards internacionais ISO 16484-5 (BACnet), ISO/IEC 14908-1 (LON), ISO/IEC 14543 (KNX), IEC 62386 2014 (DALI), e OPC, ainda suporta, EnOcean (wireless),

M-Bus (medição), MP-Bus (Belimo) e Modbus.

LOYTEC oferecerá sempre a melhor qualidade, desenho e desenvolvimento do BMS LWEB-900, dado que constitui a base da gestão técnica num edifício ou em grupos de edifícios.

A mais alta eficiência energética e a gestão transparente de instalações técnicas de edifícios requer sistemas de automação integrados de forma simples.

Especialmente aquecimento, ventilação, ar condicionado, luminosidade e proteção solar são essenciais. Os LOYTEC L-INX Automation Servers e L-ROC Room Controllers são capazes de gerir e integrar o sub-sistema correspondente de formas altamente eficientes.



LOYTEC electronics GmbH
Blumengasse 35
1170 Vienna
Austria

www.loytec.com
info@loytec.com

Delta Electronics (Americas), Inc.
LOYTEC
Building Automation Business
Group
N27 W23957 Paul Road, Suite 103
Pewaukee, WI 53072, USA
www.loytec-americas.com
info@loytec-americas.com

Delta Electronics, Inc.
256 Yangguang Street
Neihu, Taipei 11491
Taiwan, R.O.C.

www.deltaww.com
bas.sales@deltaww.com

AST, LC3020, L-Chip, L-Core, L-DALI, L-ENO, L-GATE, L-INX, L-IOB, LIOB-AIR, LIOB-Connect, LIOB-FT, L-IOT, L-IP, L-KNX, L-MBUS, L-MPBUS, L-OPC, LPA, L-POW, L-Proxy, L-ROC, L-SMI, L-PAD, L-STAT, L-STUDIO, L-Switch^{XP}, L-TE, L-Term, L-VIS, L-WEB, L-WLAN, ORION Stack, Smart Auto-Connect, buildings under control are trademarks of LOYTEC electronics GmbH.

Echelon, LON, LONWORKS, LNS, LonMaker, and Neuron are trademarks of Echelon Corporation registered in the United States and other countries. LonMark and the LonMark Logo are registered trademarks owned by LonMark International. BACnet is a registered trade mark of the American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE). KNX Association cvba is the owner of the worldwide standard for Home and Building Control: KNX and also the owner of the KNX trademark logo worldwide. Diia, DALI and DALI-2 logos are registered trademarks of the Digital Illumination Interface Alliance. EnOcean® and the EnOcean logo are registered trademarks of EnOcean GmbH.

Other trademarks and trade names used in this document refer either to the entities claiming the markets and names, or to their products. LOYTEC disclaims proprietary interest in the markets and names of others.

Statements in this report that relate to future results and events are based on the company's current expectations. Actual results in future periods may differ materially from those currently expected or desired because of a number of risks and uncertainties.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of LOYTEC. Product specifications, availability, and design are subject to change without prior notice.